


1

2

3


4

REV. ECN NO.

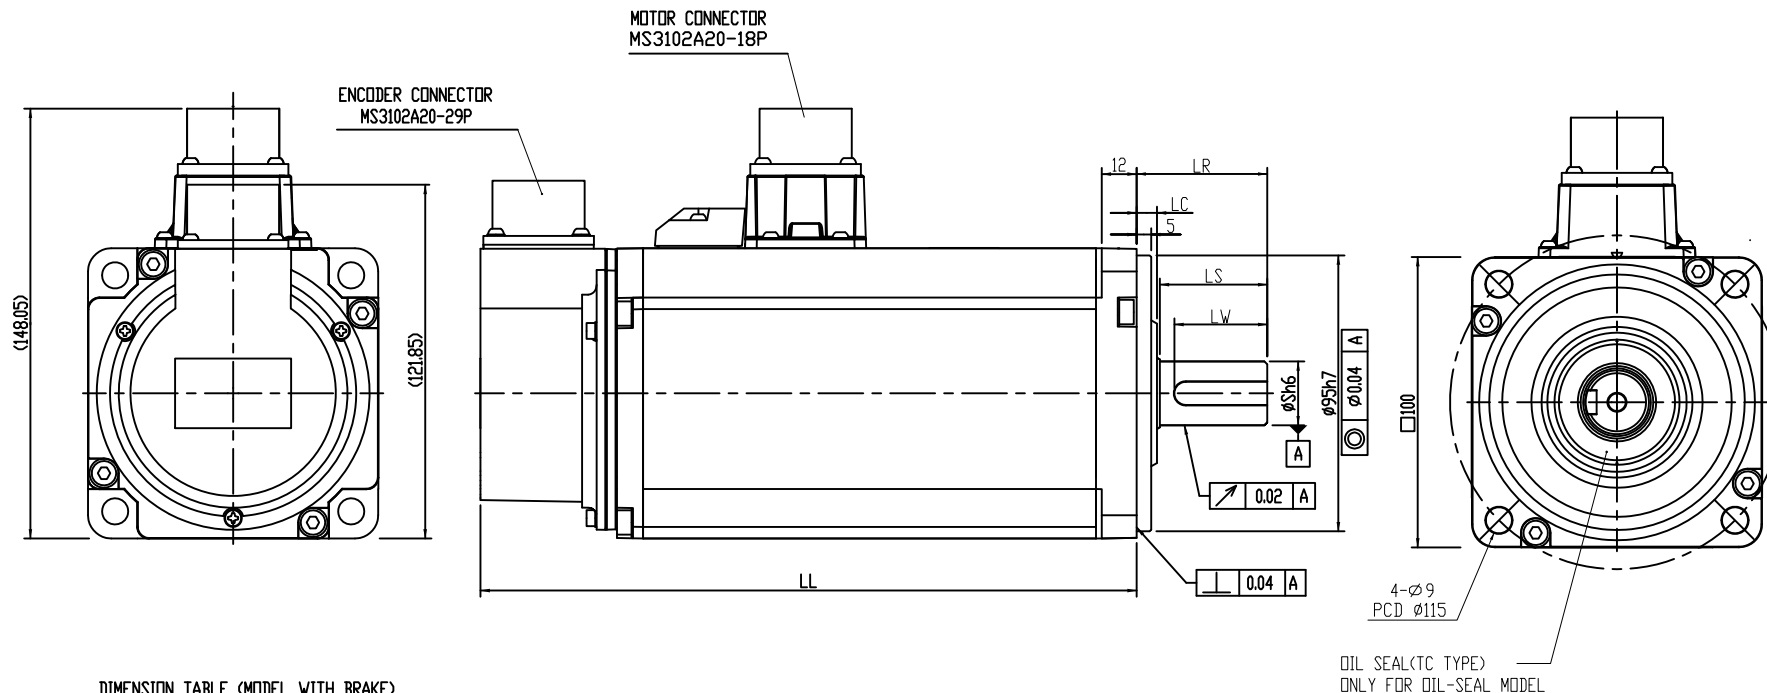


DIMENSION TABLE (MODEL WITH BRAKE)

MODEL	LL	LR	LS	LC	S	LW	WK	W	T	RH	TP
ECMA-J $\square$ 1010BS	192.5	45	37.0	7	22	—	—	—	—	—	M6, Depth 20
ECMA-J $\square$ 1010DS						—	—	—	—	—	—
ECMA-J $\square$ 1010FS						32	8	8	7	18	—
ECMA-J $\square$ 1010HS						32	8	8	7	18	M6, Depth 20
ECMA-J $\square$ 1010QS	226	45	37.0	7	22	—	—	—	—	—	M6, Depth 20
ECMA-J $\square$ 1010SS						—	—	—	—	—	—
ECMA-J $\square$ 1020BS						—	—	—	—	—	M6, Depth 20
ECMA-J $\square$ 1020DS						—	—	—	—	—	—
ECMA-J $\square$ 1020FS	226	45	37.0	7	22	32	8	8	7	18	—
ECMA-J $\square$ 1020HS						32	8	8	7	18	—
ECMA-J $\square$ 1020QS						32	8	8	7	18	M6, Depth 20
ECMA-J $\square$ 1020SS						32	8	8	7	18	M6, Depth 20



SHAFT END DETAILS



KEY DETAILS

Pobrane z: <https://automatyka-sklep.eu/serwosilnik-z-hamulcem-delta-electronics-6-37nm-2000w-3000-obrmin-ecma-j11020ss>

2

3

4

台達電子工業股份有限公司 DELTA ELECTRONICS, INC.		DRAWN:		DESIGN:	
APPROVE:		DATE: 10/21/2013			
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DELTA ELECTRONICS, INC. AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SELL OF APPARATUS OR DEVICES WITHOUT PERMISSION.					
DIMENSIONAL TOLERANCES DECIMALS <50 ±0.1 <50 ±0.15 <50 ±0.2 <30° ±0.1° X ±0.3 >50-100 ±0.15 >50-100 ±0.2 >50-100 ±0.25 >30°-60° ±0.3° X.X ±0.2 >100-200 ±0.2 >100-200 ±0.25 >100-200 ±0.3 >60°-90° ±0.5° X.XX ±0.1 >200~ ±0.2% >200~ ±0.25% >200~ ±0.3%					
DESCRIPTION: CONFIDENTIAL MOTOR_F100_380V_BRAKE		A3 SIZE THIRD ANGLE PROJECTION		PART NO.: REV. 00	
USED ON		UNIT mm		SHEET 1 OF 1	