



Power contactor
BG06

Product designation

Product type designation

Contact characteristics

| | | |
|--|---|--------|
| Number of poles | nr. | 3 |
| Rated insulation voltage U_i IEC/EN | V | 690 |
| Rated impulse withstand voltage U_{imp} | kV | 6 |
| Operational frequency | min | Hz 25 |
| | max | Hz 400 |
| IEC Conventional free air thermal current I_{th} | A | 16 |
| Operational current I_e | AC-1 ($\leq 40^\circ\text{C}$) | A 16 |
| | AC-1 ($\leq 55^\circ\text{C}$) | A 14 |
| | AC-1 ($\leq 70^\circ\text{C}$) | A 12 |
| | AC-3 ($\leq 440\text{V} \leq 55^\circ\text{C}$) | A 6 |
| | AC-4 (400V) | A 3.3 |
| Rated operational power AC-3 ($T \leq 55^\circ\text{C}$) | 230V | kW 1.5 |
| | 400V | kW 2.2 |
| | 415V | kW 2.4 |
| | 440V | kW 2.5 |
| | 500V | kW 3 |
| | 690V | kW 3 |
| Rated operational power AC-1 ($T \leq 40^\circ\text{C}$) | 230V | kW 6 |
| | 400V | kW 10 |
| | 500V | kW 13 |
| | 690V | kW 18 |
| IEC max current I_e in DC1 with $L/R \leq 1\text{ms}$ with 1 poles in series | $\leq 24\text{V}$ | A 9 |
| | 48V | A 8 |
| | 75V | A 4 |
| | 110V | A 3 |
| | 220V | A – |
| IEC max current I_e in DC1 with $L/R \leq 1\text{ms}$ with 2 poles in series | $\leq 24\text{V}$ | A 12 |
| | 48V | A 11 |
| | 75V | A 7 |
| | 110V | A 6 |
| | 220V | A – |
| IEC max current I_e in DC1 with $L/R \leq 1\text{ms}$ with 3 poles in series | $\leq 24\text{V}$ | A 14 |
| | 48V | A 14 |
| | 75V | A 8 |
| | 110V | A 8 |

| | | | |
|---|-------------------|------------|------|
| | 220V | A | 1 |
| <hr/> | | | |
| IEC max current I_e in DC1 with $L/R \leq 1\text{ms}$ with 4 poles in series | $\leq 24\text{V}$ | A | – |
| | 48V | A | – |
| | 75V | A | – |
| | 110V | A | – |
| | 220V | A | – |
| <hr/> | | | |
| IEC max current I_e in DC3-DC5 with $L/R \leq 15\text{ms}$ with 1 poles in series | $\leq 24\text{V}$ | A | 6 |
| | 48V | A | 5 |
| | 75V | A | 2 |
| | 110V | A | 1 |
| | 220V | A | – |
| <hr/> | | | |
| IEC max current I_e in DC3-DC5 with $L/R \leq 15\text{ms}$ with 2 poles in series | $\leq 24\text{V}$ | A | 7 |
| | 48V | A | 7 |
| | 75V | A | 4 |
| | 110V | A | 3 |
| | 220V | A | – |
| <hr/> | | | |
| IEC max current I_e in DC3-DC5 with $L/R \leq 15\text{ms}$ with 3 poles in series | $\leq 24\text{V}$ | A | 9 |
| | 48V | A | 9 |
| | 75V | A | 5 |
| | 110V | A | 4 |
| | 220V | A | 0.5 |
| <hr/> | | | |
| IEC max current I_e in DC3-DC5 with $L/R \leq 15\text{ms}$ with 4 poles in series | $\leq 24\text{V}$ | A | – |
| | 48V | A | – |
| | 75V | A | – |
| | 110V | A | – |
| | 220V | A | – |
| <hr/> | | | |
| Short-time allowable current for 10s (IEC/EN60947-1) | | A | 96 |
| <hr/> | | | |
| Protection fuse | gG (IEC) | A | 16 |
| | aM (IEC) | A | 6 |
| <hr/> | | | |
| Making capacity (RMS value) | | A | 92 |
| <hr/> | | | |
| Breaking capacity at voltage | 440V | A | 72 |
| | 500V | A | 72 |
| | 690V | A | 72 |
| <hr/> | | | |
| Resistance per pole (average value) | | m Ω | 10 |
| <hr/> | | | |
| Power dissipation per pole (average value) | Ith | W | 2.6 |
| | AC3 | W | 0.36 |
| <hr/> | | | |
| Tightening torque for terminals | min | Nm | 0.8 |
| | max | Nm | 1 |
| | min | Ibin | 0.59 |
| | max | Ibin | 0.74 |
| <hr/> | | | |
| Tightening torque for coil terminal | min | Nm | 0.8 |
| | max | Nm | 1 |
| | min | Ibft | 0.8 |

| | | | |
|---|--------------------------------------|--------------------|----------|
| | max | lbft | 0.74 |
| Max number of wires simultaneously connectable | | nr. | 2 |
| Conductor section | | | |
| Flexible w/o lug conductor section | min | mm ² | 0.75 |
| | max | mm ² | 2.5 |
| Flexible c/w lug conductor section | min | mm ² | 1.5 |
| | max | mm ² | 2.5 |
| Flexible with insulated spade lug conductor section | min | mm ² | 1.5 |
| | max | mm ² | 2.5 |
| Power terminal protection according to IEC/EN 60529 | IP20 when wired | | |
| Mechanical features | | | |
| Operating position | normal allowable | Vertical plan ±30° | |
| Fixing | Screw / DIN rail 35mm | | |
| Weight | g | 180 | |
| Auxiliary contact characteristics | | | |
| Type of contact | 1 NO | | |
| Thermal current I _{th} | A | 10 | |
| IEC/EN 60947-5-1 designation | A600 - Q600 | | |
| Operating current AC15 | 230V | A | 3 |
| | 400V | A | 1.9 |
| | 500V | A | 1.4 |
| Operating current DC12 | 110V | A | 2.9 |
| Operating current DC13 | 24V | A | 2.9 |
| | 48V | A | 1.4 |
| | 60V | A | 1.2 |
| | 110V | A | 0.6 |
| | 125V | A | 0.55 |
| | 220V | A | 0.3 |
| | 600V | A | 0.1 |
| Operations | | | |
| Mechanical life | cycles | 20000000 | |
| Electrical life | cycles | 500000 | |
| Safety related data | | | |
| Performance level B10d according to EN/ISO 13489-1 | rated load mechanical load | cycles | 500000 |
| | | cycles | 20000000 |
| Mirror contacts according to IEC/EN 60947-4-1 | yes | | |
| EMC compatibility | Yes | | |
| Rated AC voltage at 60Hz | V | 24 | |
| AC coil operating | | | |
| AC operating voltage | of 60Hz coil powered at 60Hz pick-up | | |
| | min | %Us | 75 |

| | | | |
|--|----------|----------|------|
| drop-out | max | %Us | 115 |
| | min | %Us | 20 |
| | max | %Us | 55 |
| AC average coil consumption at 20°C | | | |
| of 50/60Hz coil powered at 50Hz | | | |
| | in-rush | VA | 30 |
| | holding | VA | 4 |
| of 50/60Hz coil powered at 60Hz | | | |
| | in-rush | VA | 25 |
| | holding | VA | 3 |
| of 60Hz coil powered at 60Hz | | | |
| | in-rush | VA | 30 |
| | holding | VA | 4 |
| Dissipation at holding ≤20°C 50Hz | | W | 0.95 |
| Max cycles frequency | | | |
| Mechanical operation | | cycles/h | 3600 |
| Operating times | | | |
| Average time for Us control | | | |
| in AC | | | |
| Closing NO | min | ms | 12 |
| | max | ms | 21 |
| Opening NO | min | ms | 9 |
| | max | ms | 18 |
| Closing NC | min | ms | 17 |
| | max | ms | 26 |
| Opening NC | min | ms | 7 |
| | max | ms | 17 |
| in DC | | | |
| Closing NO | min | ms | 18 |
| | max | ms | 25 |
| Opening NO | min | ms | 2 |
| | max | ms | 3 |
| Closing NC | min | ms | 3 |
| | max | ms | 5 |
| Opening NC | min | ms | 11 |
| | max | ms | 17 |
| UL technical data | | | |
| Full-load current (FLA) for three-phase AC motor | | | |
| | at 480V | A | 4.8 |
| | at 600V | A | 3.9 |
| Yielded mechanical performance | | | |
| for single-phase AC motor | | | |
| | 110/120V | HP | 0.3 |
| | 230V | HP | 1 |
| for three-phase AC motor | | | |

| | | |
|----------|----|-----|
| 200/208V | HP | 1.5 |
| 220/230V | HP | 2 |
| 460/480V | HP | 3 |
| 575/600V | HP | 3 |

General USE

Contactor

| | | |
|------------|---|----|
| AC current | A | 16 |
|------------|---|----|

Short-circuit protection fuse, 600V
High fault

| | | |
|-----------------------|----|-----|
| Short circuit current | kA | 100 |
| Fuse rating | A | 30 |
| Fuse class | | J |

Standard fault

| | | |
|-----------------------|----|----|
| Short circuit current | kA | 5 |
| Fuse rating | A | 30 |

Contact rating of auxiliary contacts according to UL

A600 - Q600

Ambient conditions

Temperature

Operating temperature

| | | |
|-----|----|-----|
| min | °C | -50 |
| max | °C | +70 |

Storage temperature

| | | |
|-----|----|-----|
| min | °C | -60 |
| max | °C | +80 |

Max altitude


m 3000

Resistance & Protection


Pollution degree

3

Dimensions

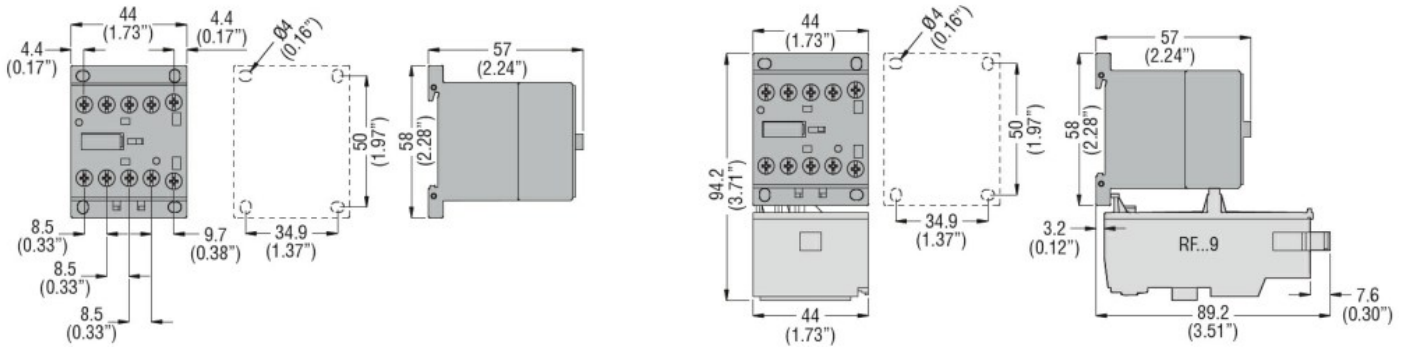

Wiring diagrams

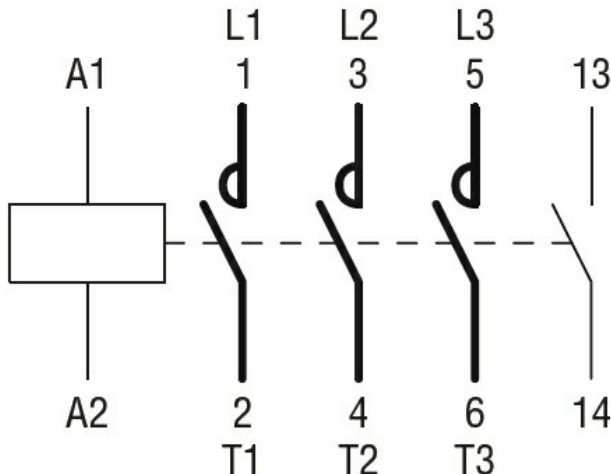

Certifications and compliance

Compliance

CSA C22.2 n° 60947-1

CSA C22.2 n° 60947-4-1

IEC/EN 60947-1

IEC/EN 60947-4-1

UL 60947-1

UL 60947-4-1

Certificates

CCC

cULus

EAC

ETIM classification

ETIM 8.0

EC000066 -
Power contactor,
AC switching