



## HMI with 12.1" X VGA TFT Display


### Feature

- Aluminum Housing and Brand New Color & Design
- 12.1" 1024 x 768 TFT Industrial Grade LCD
- Long Life LED Back Light with Ceramics Package
- Fan-less Cooling System
- Built-in 256 MB Flash Memory and RTC
- SD Card Slot for Expansion of Storage
- One USB Host Port and one USB Client Port
- COM1 and COM3 RS-485 & CAN Bus Built-in Isolation
- COM1 and COM3 RS-485 2W supports MPI 187.5K, please use one at one time
- CAN Bus port supports CANopen Protocol
- Built-in Power Isolator
- NEMA4 / IP66 Compliant Front Panel

<b>Display</b>	Display	12.1" TFT	
	Resolution	1024 x 768	
	Brightness (cd/m <sup>2</sup> )	500	
	Contrast Ratio	700:1	
	Backlight Type	LED	
	Backlight Life Time	>50,000 hrs.	
	Colors	16.2M	
	LCD Viewing Angle (T/B/L/R)	80/80/80/80	
<b>Touch Panel</b>	Type	4-wire Resistive Type	
	Accuracy	Active Area Length(X)±2%, Width(Y)±2%	
<b>Memory</b>	Flash	256 MB	
	RAM	256 MB	
<b>Processor</b>		32 bit RISC CPU 800MHz	
<b>I/O Port</b>	SD Card Slot	SD/SDHC	
	USB Host	USB 2.0 x 1	
	USB Client	USB 2.0 x 1	
	Ethernet	10/100 Base-T x 1	
	COM Port	COM1: RS-232/RS-485 2W/4W COM3: RS-232/RS-485 2W*	
	RS-485 Dual Isolation	Yes	
	CAN Bus	Yes	
	HDMI	N/A	
	Audio Output	N/A	
Video Input	N/A		
<b>RTC</b>		Built-in	
<b>Power</b>	Input Power	24±20%VDC	
	Power Isolation	Built-in	
	Power Consumption	850m A@24VDC	
	Voltage Resistance	500VAC (1 min.)	
	Isolation Resistance	Exceed 50MΩ at 500VDC	
Vibration Endurance	10 to 25Hz (X, Y, Z direction 2G 30 minutes)		
<b>Specification</b>	PCB Coating	Yes	
	Enclosure	Aluminum	
	Dimensions WxHxD	317 x 244 x 46 mm	
	Panel Cutout	305 x 231 mm	
	Weight	Approx. 2.1 kg	
Mount	Panel mount, VESA mount 75 x 75 mm		
<b>Environment</b>	Protection Structure	NEMA 4 / IP66 Compliant Front Panel	
	Storage Temperature	-20° ~ 70°C (-4° ~ 158°F)	
	Operating Temperature	0° ~ 50°C (32° ~ 122°F)	
	Relative Humidity	10% ~ 90% (non-condensing)	
<b>Certificate</b>	CE	CE marked	
	UL	cULus Listed	
<b>Software</b>		EasyBuilder Pro	

\*Only Tx & Rx (no RTS/CTS) may be used for COM1 RS-232 when COM3 RS-232 is also used.

## Dimensions

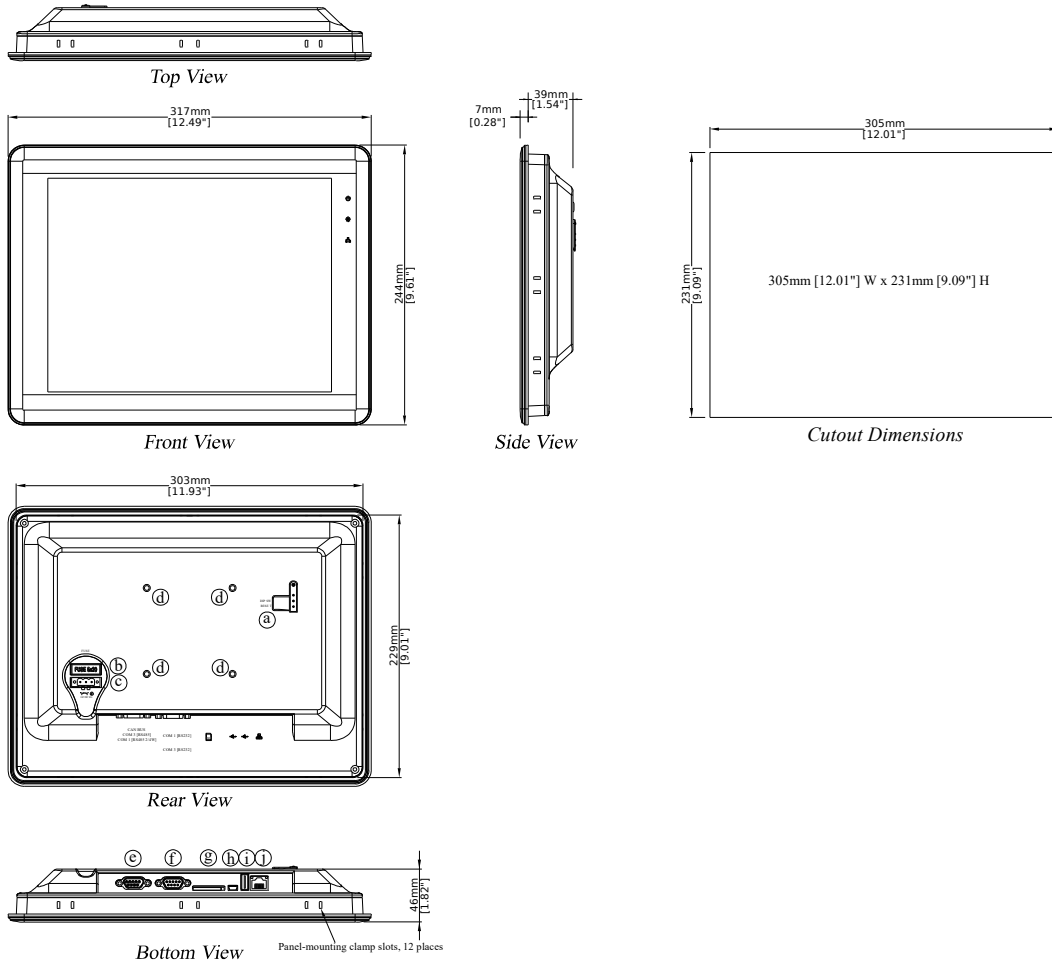

<b>a</b>	DIP SW & Reset Button	<b>f</b>	COM1 RS-232, COM3 RS-232
<b>b</b>	Fuse	<b>g</b>	SD Card Slot
<b>c</b>	Power Connector	<b>h</b>	USB Client Port
<b>d</b>	VESA 75 mm Screw Holes	<b>i</b>	USB Host Port
<b>e</b>	COM1 RS-485, COM3 RS-485, CAN Bus	<b>j</b>	Ethernet Port

## Ordering Information

- eMT3120A**  
12.1" TFT LCD HMI, 256 MB flash memory / 256 MB RAM on board
- FLZ485000**  
Multi-Connector cable COM1[485] / COM3[485] / CAN Bus
- FLZ232000**  
Multi-Connector cable COM1[232] / COM3[232]

### Pin Assignment:

#### COM1 / COM3 [RS232] 9 Pin, Male, D-sub

PIN#	COM1 [RS232]	COM3 [RS232]
1		
2	RxD	
3	TxD	
4		
5	GND	
6		
7	RTS	TxD
8	CTS	RxD
9		

#### COM1 / COM3 [RS485] / CAN Bus 9 Pin, Female, D-sub

PIN#	COM1 [RS485]2W	COM1 [RS485]4W	COM3 [RS485]	CAN Bus
1	Data-	Rx-		
2	Data+	Rx+		
3		Tx-		
4		Tx+		
5	GND (Isolation)			
6			Data-	
7				CAN_L
8				CAN_H
9			Data+	