


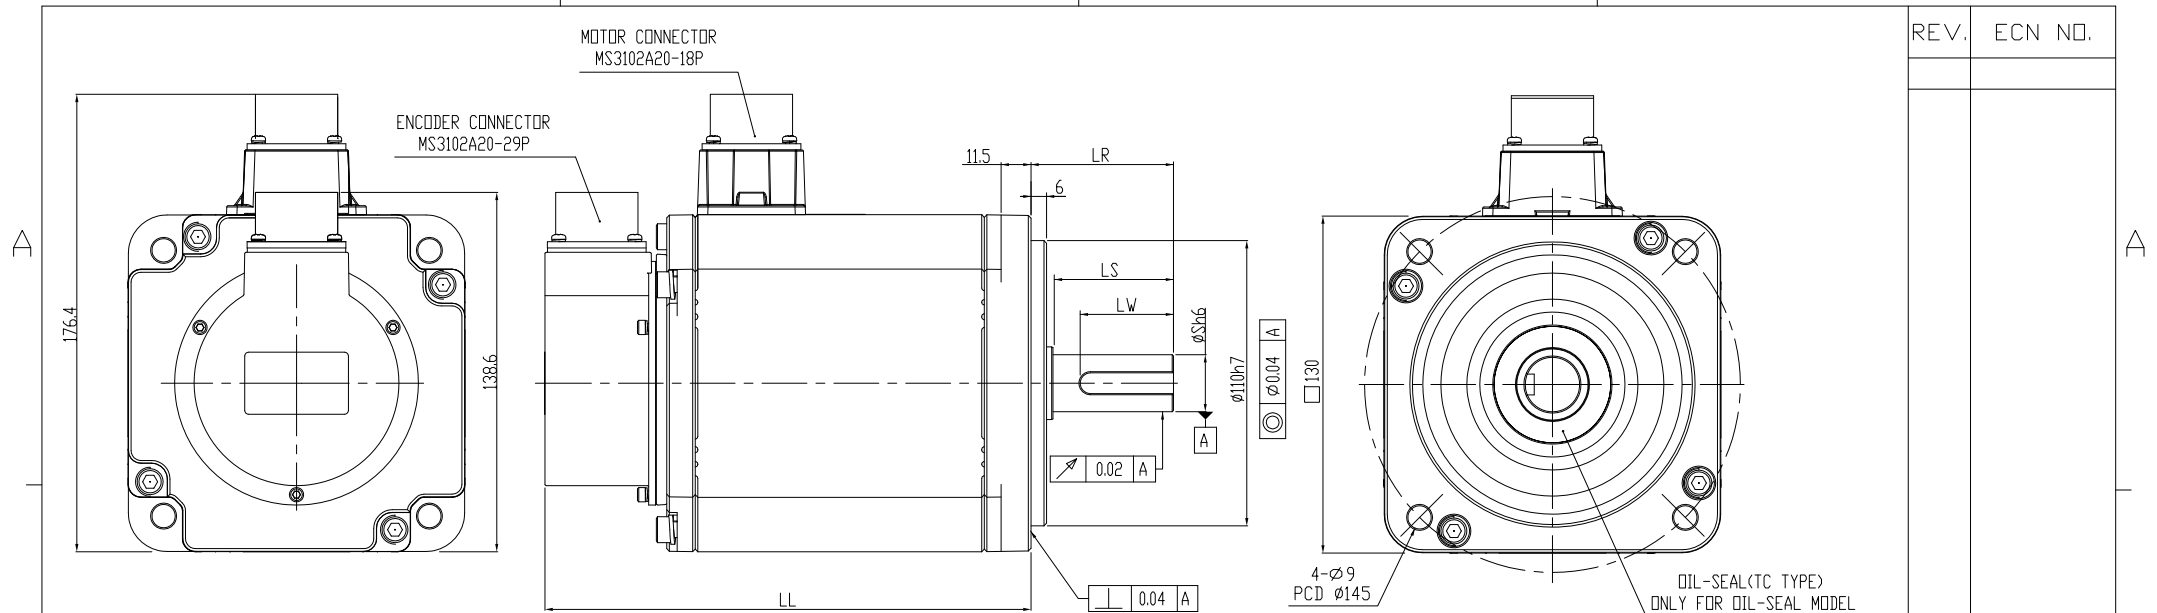

DIMENSION TABLE (MODEL WITHOUT BRAKE)

B

C

MODEL	LL	LR	LS	S	LW	WK	W	T	RH	TP
ECMA-G 1303CS	147.5	55	47	22	---	---	---	---	---	M6, Depth 20
ECMA-G 1303ES					36	8	8	7	18	---
ECMA-G 1303PS					36	8	8	7	18	M6, Depth 20
ECMA-G 1303RS					---	---	---	---	---	M6, Depth 20
ECMA-E 1305CS					36	8	8	7	18	---
ECMA-E 1305ES					36	8	8	7	18	---
ECMA-E 1305PS					36	8	8	7	18	M6, Depth 20
ECMA-E 1305RS					---	---	---	---	---	M6, Depth 20
ECMA-G 1306CS					36	8	8	7	18	---
ECMA-G 1306ES					36	8	8	7	18	---
ECMA-G 1306PS	36				8	8	7	18	M6, Depth 20	
ECMA-G 1306RS	---				---	---	---	---	M6, Depth 20	
ECMA-G 1309CS	163.5				36	8	8	7	18	---
ECMA-G 1309ES					36	8	8	7	18	---
ECMA-G 1309PS					36	8	8	7	18	M6, Depth 20
ECMA-G 1309RS					---	---	---	---	---	M6, Depth 20
ECMA-E 1310CS	147.5				36	8	8	7	18	---
ECMA-E 1310ES					36	8	8	7	18	---
ECMA-E 1310PS					36	8	8	7	18	M6, Depth 20
ECMA-E 1310RS					---	---	---	---	---	M6, Depth 20
ECMA-E 1315CS	167.5				36	8	8	7	18	---
ECMA-E 1315ES					36	8	8	7	18	---
ECMA-E 1315PS					36	8	8	7	18	M6, Depth 20
ECMA-E 1315RS					---	---	---	---	---	M6, Depth 20
ECMA-E 1320CS	187.5				36	8	8	7	18	---
ECMA-E 1320ES					36	8	8	7	18	---
ECMA-E 1320PS		36	8	8	7	18	M6, Depth 20			
ECMA-E 1320RS		---	---	---	---	---	M6, Depth 20			

MODEL	LL	LR	LS	S	LW	WK	W	T	RH	TP
ECMA-C 1330C4	187.5	55	47	24	---	---	---	---	---	M6, Depth 20
ECMA-C 1330E4					36	8	8	7	20	---
ECMA-C 1330P4					36	8	8	7	20	M6, Depth 20
ECMA-C 1330R4					---	---	---	---	---	M6, Depth 20

Pobrano z: <https://automatyka-sklep.eu/serwosilnik-bez-hamulca-delta-electronics-9-55nm-2000w-2000-obrmin-ecma-e11320es>

台達電子工業股份有限公司
DELTA ELECTRONICS, INC.

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DELTA ELECTRONICS, INC. AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SELL OF APPARATUSES OR DEVICES WITHOUT PERMISSION.

DESCRIPTION: MOTOR_F130

USED ON

DRAWN: APPROVE:

DESIGN: DATE: 06/14/2017

DIMENSIONAL TOLERANCES
() () () () () ()
DECIMALS <50 ±0.1 <50 ±0.15 <50 ±0.2 <30° ±0.1°
X ±0.3 >50-100 ±0.15 >50-100 ±0.2 >50-100 ±0.25 >30°-60° ±0.3°
X.X ±0.2 >100-200 ±0.2 >100-200 ±0.25 >100-200 ±0.3 >60°-90° ±0.5°
X.XX ±0.1 >200~ ±0.2% >200~ ±0.25% >200~ ±0.3%

PART NO.: REV. 01