


1

2

3


4

REV. ECN NO.

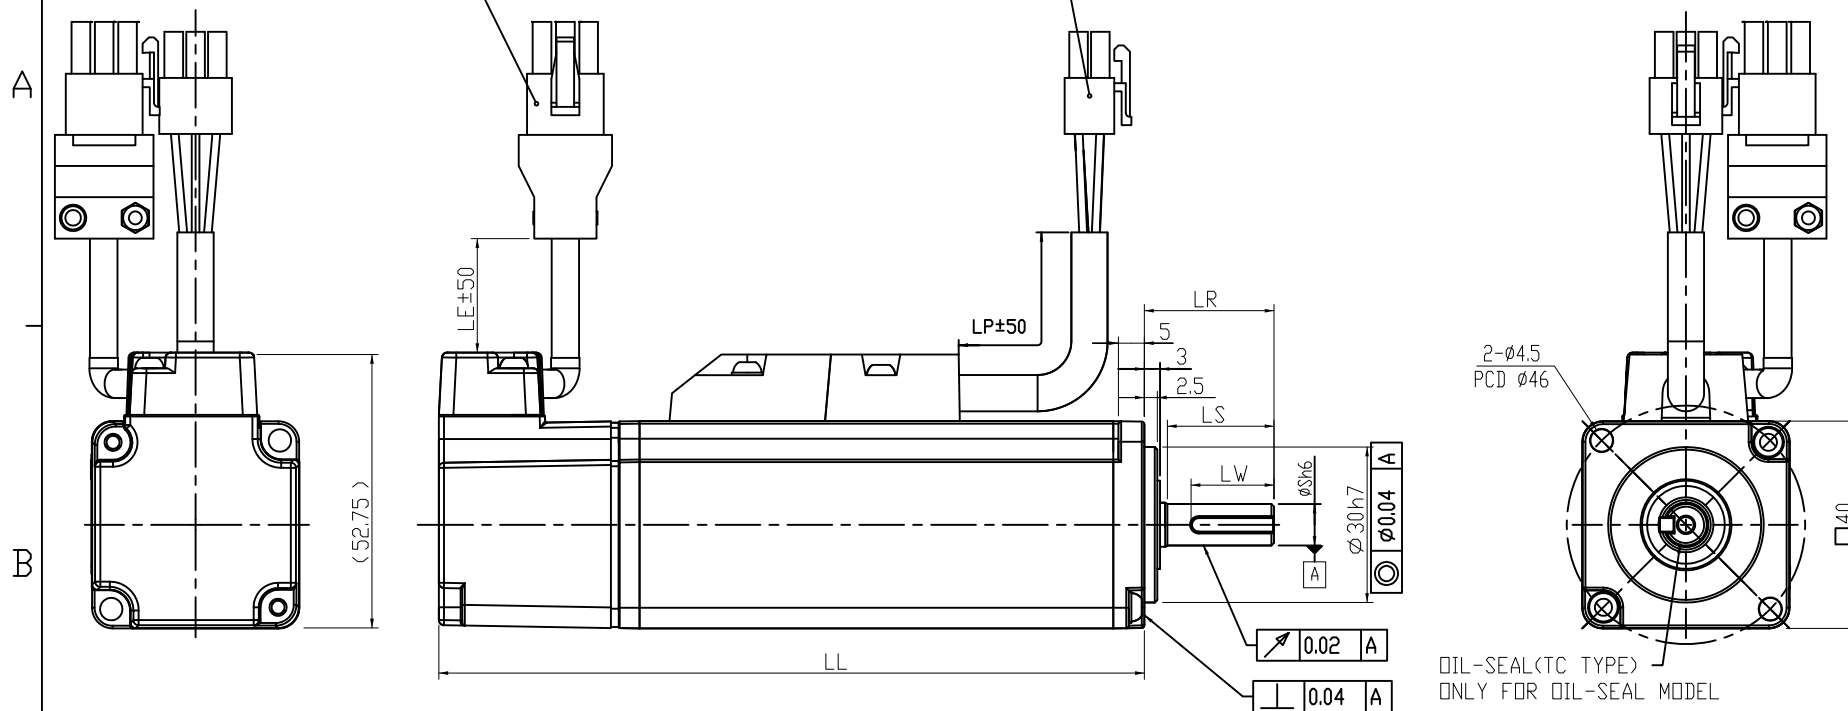
ENCODER CONNECTOR
AMP 1-172169-9MOTOR CONNECTOR
CP-01106011

DIMENSION TABLE (MODEL WITH BRAKE)

MODEL	LL	LR	LS	S	LW	WK	W	T	RH	TP	LP	LE
ECMA-C10401BS	136.6	25	20	8	—	—	—	—	—	M3, Depth 8	300	300
ECMA-C10401DS					16	3	3	3	6.2	—		
ECMA-C10401FS					16	3	3	3	6.2	—		
ECMA-C10401HS					16	3	3	3	6.2	—		
ECMA-C10401QS	136.6	25	20	8	16	3	3	3	6.2	M3, Depth 8	300	300
ECMA-C10401SS					16	3	3	3	6.2	M3, Depth 8		



SHAFT END DETAILS



KEY DETAILS

Pobrano z: <https://automatyka-sklep.eu/serwosilnik-z-hamulcem-delta-electronics-0-32nm-100w-3000-obrmin-ecma-c10401ss>

台達電子工業股份有限公司 DELTA ELECTRONICS, INC.	DRAWN:	DESIGN:
	APPROVE:	DATE: 10/21/2013
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DELTA ELECTRONICS, INC. AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SELL OF APPARATUS OR DEVICES WITHOUT PERMISSION.	DIMENSIONAL TOLERANCES DECIMALS <50 ± 0.1 <50 ± 0.15 <50 ± 0.2 <30" ± 0.1 " X ± 0.3 >50-100 ± 0.15 >50-100 ± 0.2 >50-100 ± 0.25 >30"-60" ± 0.3 " X.X ± 0.2 >100-200 ± 0.2 >100-200 ± 0.25 >100-200 ± 0.3 >60"-90" ± 0.5 " X.XX ± 0.1 >200" ± 0.2 >200" ± 0.25 >200" ± 0.3	
	DESCRIPTION: CONFIDENTIAL MOTOR_F40_BRAKE	
USED ON	UNIT mm	SCALE
		SHEET 1 OF 1

REV.

00