


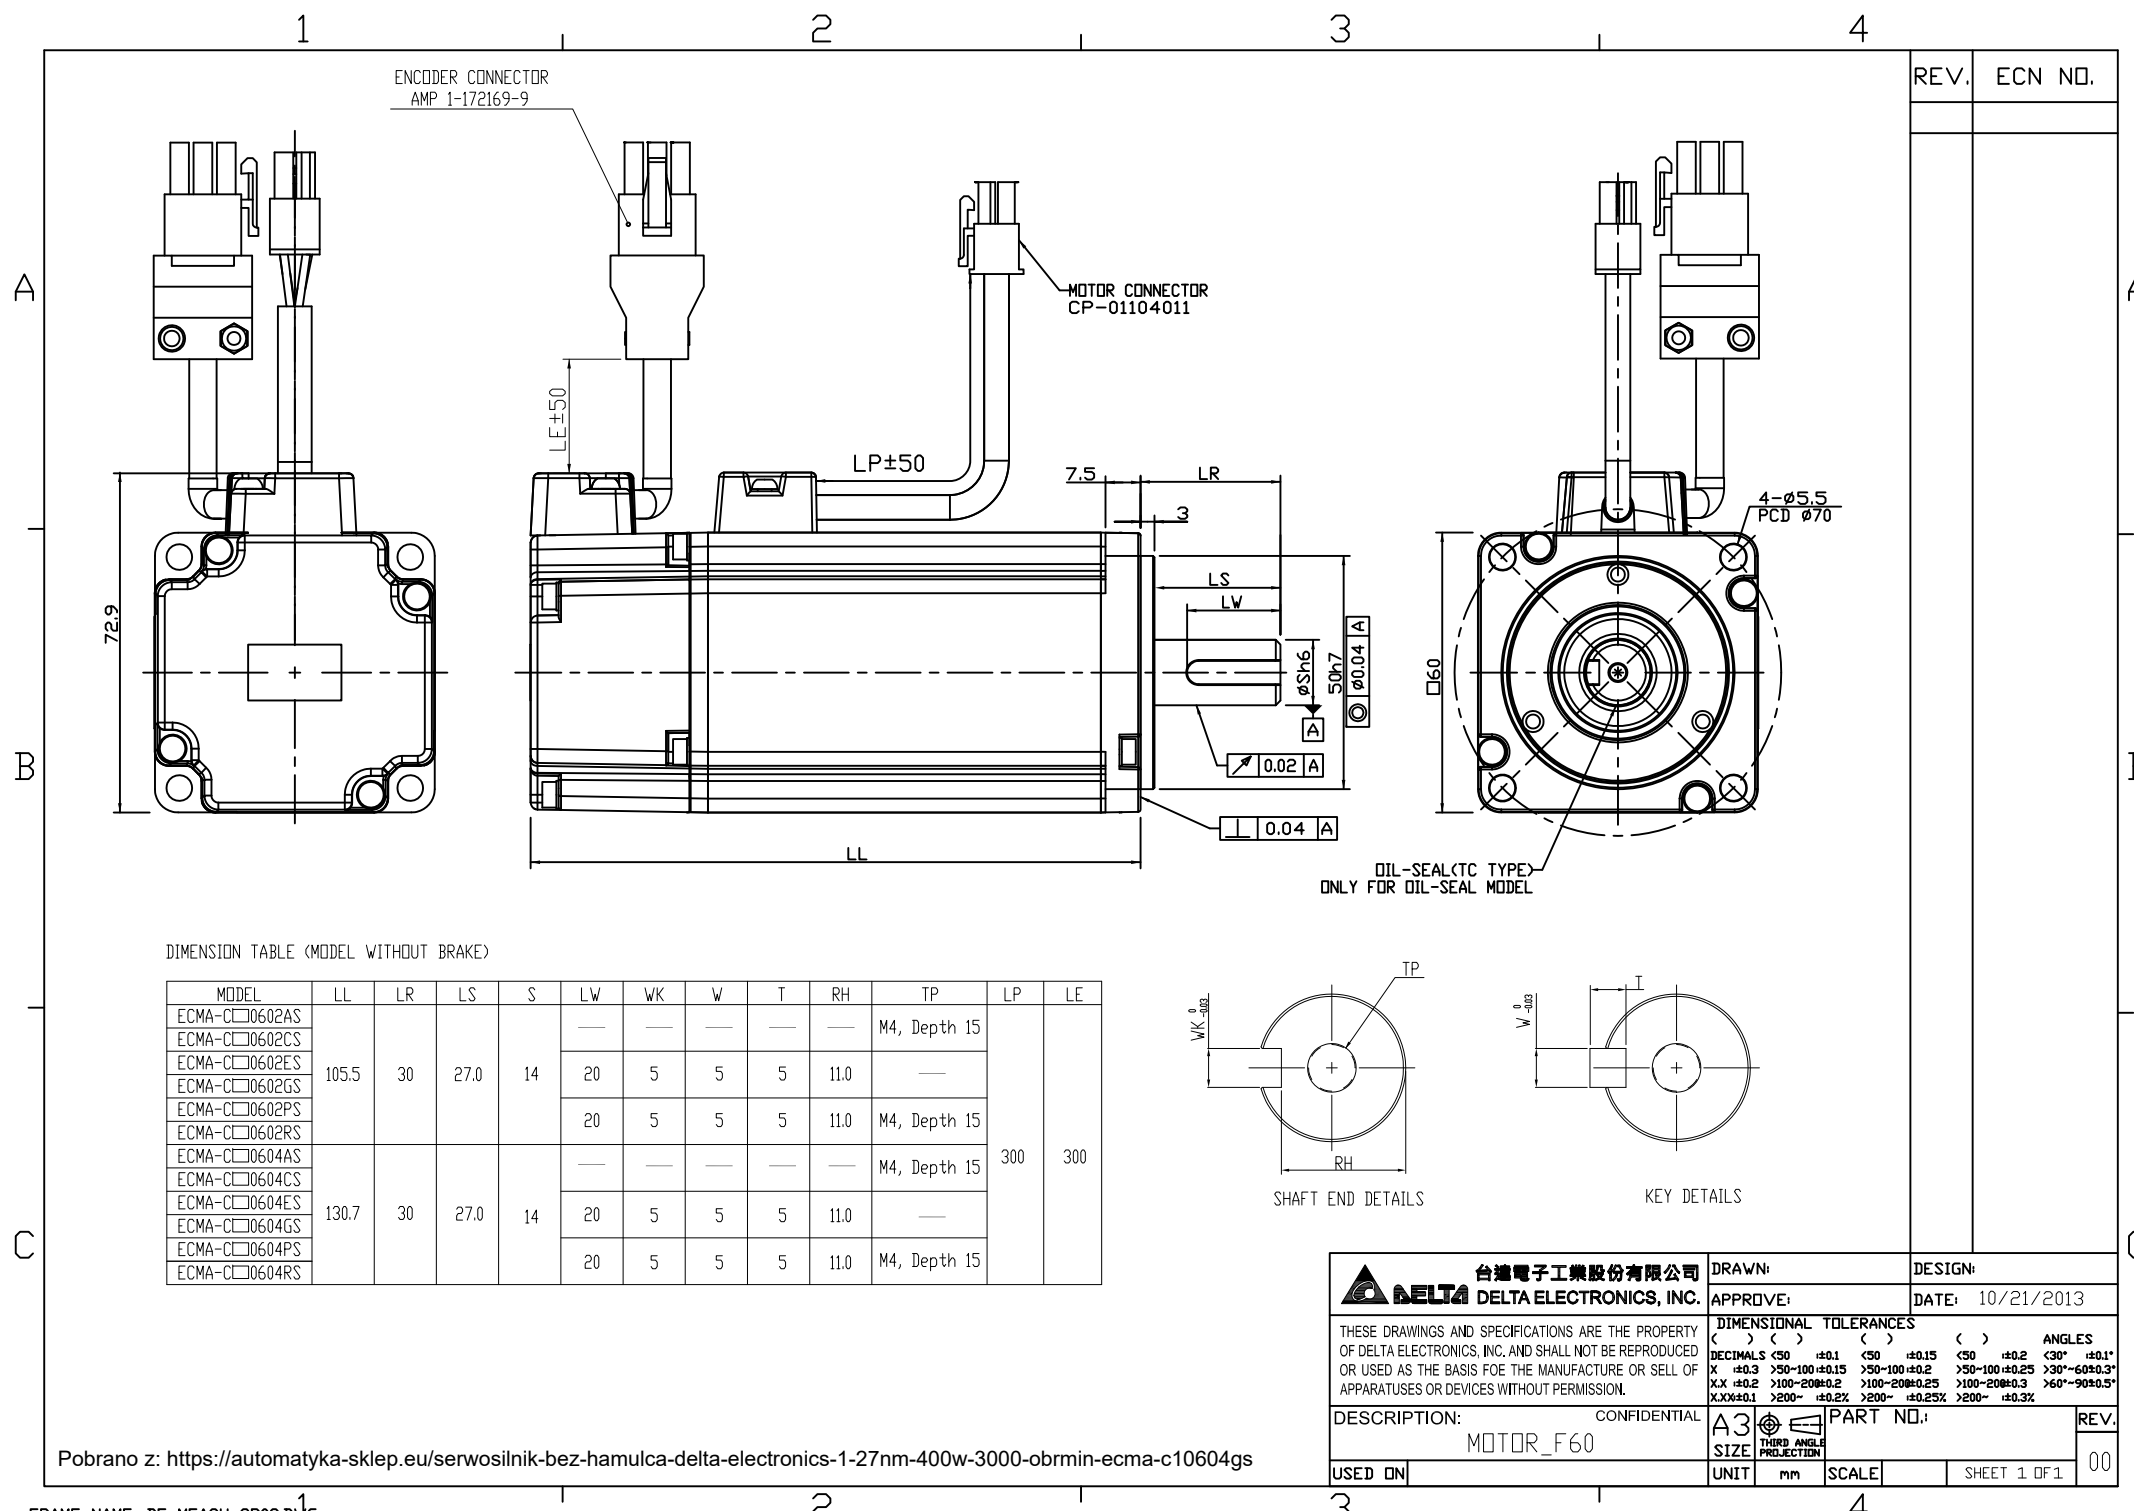

DIMENSION TABLE (MODEL WITHOUT BRAKE)

MODEL	LL	LR	LS	S	LW	WK	W	T	RH	TP	LP	LE
ECMA-C0602AS	105.5	30	27.0	14	—	—	—	—	—	M4, Depth 15	300	300
ECMA-C0602CS					20	5	5	5	11.0	—		
ECMA-C0602ES					20	5	5	5	11.0	M4, Depth 15		
ECMA-C0602GS					20	5	5	5	11.0	M4, Depth 15		
ECMA-C0602PS	130.7	30	27.0	14	—	—	—	—	—	M4, Depth 15	300	300
ECMA-C0602RS					20	5	5	5	11.0	—		
ECMA-C0604AS					20	5	5	5	11.0	M4, Depth 15		
ECMA-C0604CS					20	5	5	5	11.0	M4, Depth 15		
ECMA-C0604ES	130.7	30	27.0	14	20	5	5	5	11.0	—	300	300
ECMA-C0604GS					20	5	5	5	11.0	M4, Depth 15		
ECMA-C0604PS					20	5	5	5	11.0	M4, Depth 15		
ECMA-C0604RS												

Pobrano z: <https://automatyka-sklep.eu/serwosilnik-bez-hamulca-delta-electronics-1-27nm-400w-3000-obrmin-ecma-c10604gs>

 台達電子工業股份有限公司 DELTA ELECTRONICS, INC.	DRAWN:	DESIGN:
	APPROVE:	DATE: 10/21/2013
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DELTA ELECTRONICS, INC. AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SELL OF APPARATUS OR DEVICES WITHOUT PERMISSION.	DIMENSIONAL TOLERANCES	
	DECIMALS <50 ±0.1 <50 ±0.15 <50 ±0.2 <30° ±0.1° X ±0.3 >50~100 ±0.15 >50~100 ±0.2 >50~100 ±0.25 >30°~60° ±0.3° XX ±0.2 >100~200 ±0.2 >100~200 ±0.25 >100~200 ±0.3 >60°~90° ±0.5° XXX ±0.1 >200~ ±0.25 >200~ ±0.25 >200~ ±0.3	
DESCRIPTION: MOTOR_F60	CONFIDENTIAL	PART NO.:
USED ON	UNIT mm	SCALE
		SHEET 1 OF 1