

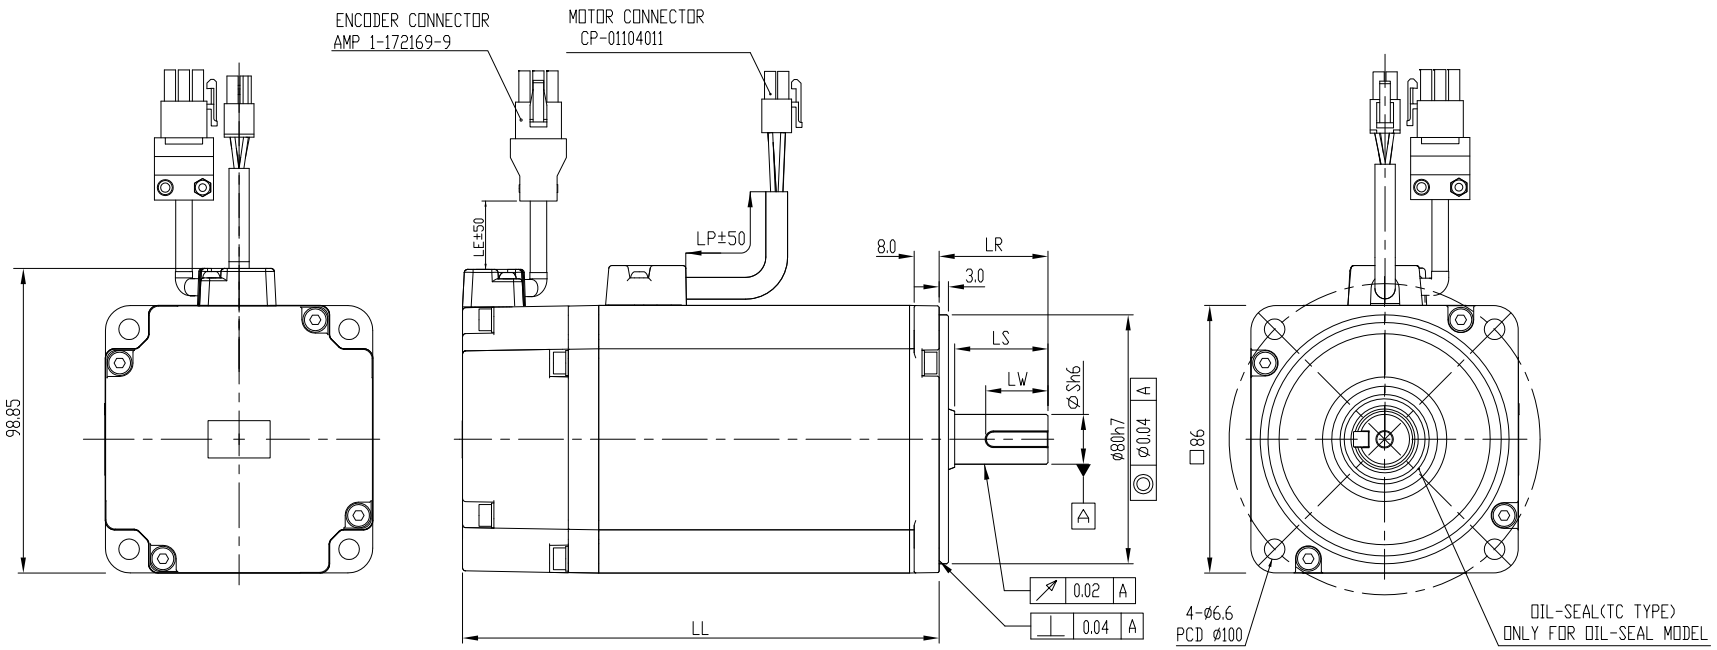




SHAFT END DETAILS



KEY DETAILS

DIMENSION TABLE (MODEL WITHOUT BRAKE)

MODEL	LL	LR	LS	S	LW	WK	W	T	RH	TP	LP	LE
ECMA-C□0910AS	153.2	35.0	30	16	—	—	—	—	—	M5, Depth 15	300	300
ECMA-C□0910CS												
ECMA-C□0910PS					20	5	5	5	13	M5, Depth 15		
ECMA-C□0910RS												
ECMA-C□0907AS	130.2	35.0	30	16	—	—	—	—	—	M5, Depth 15		
ECMA-C□0907CS												
ECMA-C□0907PS					20	5	5	5	13	M5, Depth 15		
ECMA-C□0907RS												

台達電子工業股份有限公司
DELTA ELECTRONICS, INC.

DRAWN: | DESIGN:
APPROVE: | DATE: 10/21/2013

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DELTA ELECTRONICS, INC. AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOE THE MANUFACTURE OR SELL OF APPARATUSES OR DEVICES WITHOUT PERMISSION.

DIMENSIONAL TOLERANCES

	( )	( )	( )	( )	ANGLES
DECIMALS	<50 ±0.1	<50 ±0.15	<50 ±0.2	<30° ±0.1°	
±0.3	>50~100 ±0.15	>50~100 ±0.2	>50~100 ±0.25	>30°~60° ±0.3°	
±0.2	>100~200 ±0.2	>100~200 ±0.25	>100~200 ±0.3	>60°~90° ±0.5°	
X.XX ±0.1	>200~ ±0.2%	>200~ ±0.25%	>200~ ±0.3%		

DESCRIPTION: CONFIDENTIAL
MOTOR_F86

A3 SIZE | THIRD ANGLE PROJECTION | PART NO.: | REV.

USED ON | UNIT mm | SCALE | SHEET 1 OF1 | 00

Pobrano z: https://automatyka-sklep.eu/serwosilnik-bez-hamulca-delta-electronics-3-18nm-1000w-3000-obrmin-ecma-c10910as

FRAME NAME: DF-MEA3H-3R02.DWG