
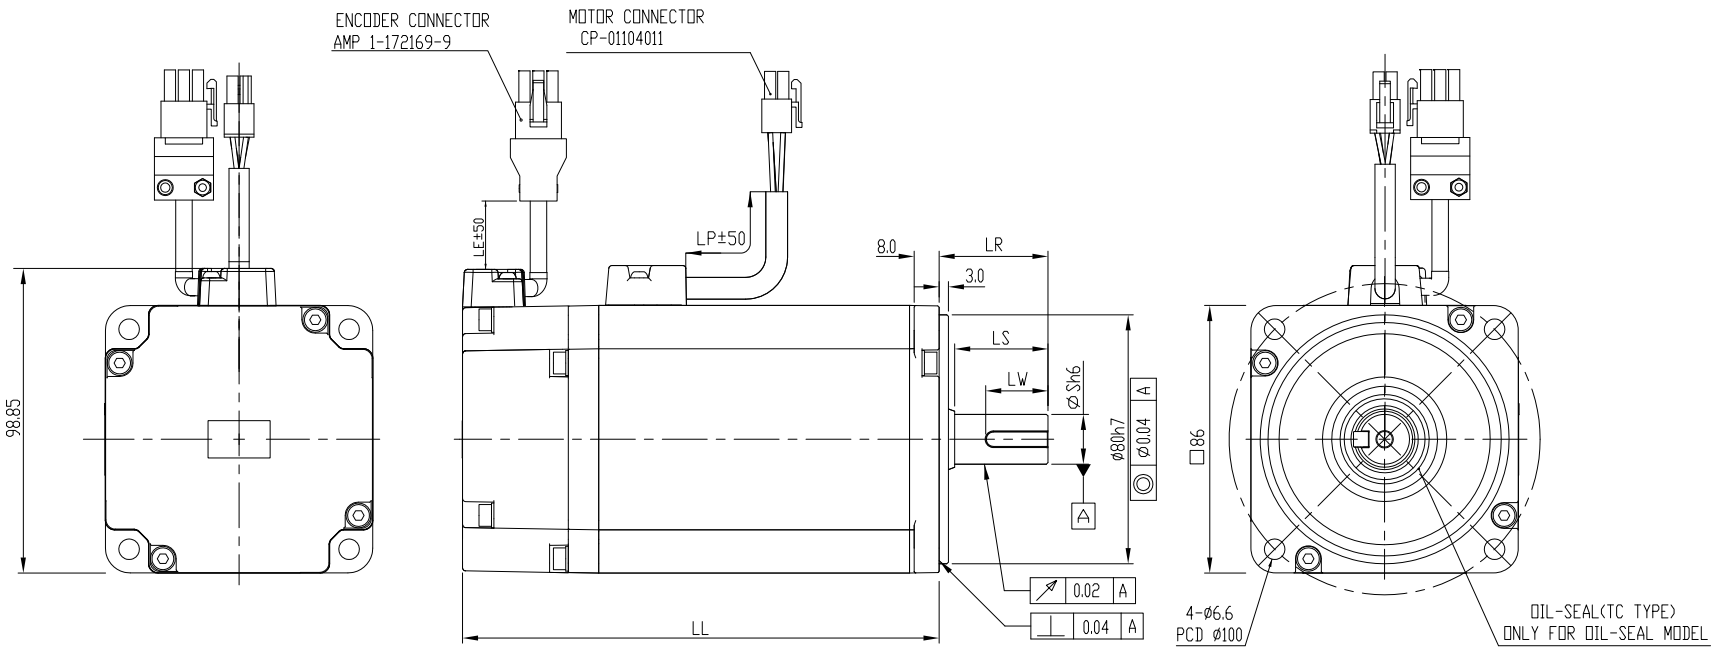




SHAFT END DETAILS




KEY DETAILS

DIMENSION TABLE (MODEL WITHOUT BRAKE)

| MODEL | LL | LR | LS | S | LW | WK | W | T | RH | TP | LP | LE |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| ECMA-C□0910AS | 153.2 | 35.0 | 30 | 16 | — | — | — | — | — | M5, Depth 15 | 300 | 300 |
| ECMA-C□0910CS | | | | | | | | | | | | |
| ECMA-C□0910PS | | | | | 20 | 5 | 5 | 5 | 13 | M5, Depth 15 | | |
| ECMA-C□0910RS | | | | | | | | | | | | |
| ECMA-C□0907AS | 130.2 | 35.0 | 30 | 16 | — | — | — | — | — | M5, Depth 15 | | |
| ECMA-C□0907CS | | | | | | | | | | | | |
| ECMA-C□0907PS | | | | | 20 | 5 | 5 | 5 | 13 | M5, Depth 15 | | |
| ECMA-C□0907RS | | | | | | | | | | | | |

台達電子工業股份有限公司
DELTA ELECTRONICS, INC.

DRAWN: | DESIGN:
APPROVE: | DATE: 10/21/2013

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DELTA ELECTRONICS, INC. AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOE THE MANUFACTURE OR SELL OF APPARATUSES OR DEVICES WITHOUT PERMISSION.

DIMENSIONAL TOLERANCES

| | ( ) | ( ) | ( ) | ( ) | ANGLES |
|---|---|---|---|---|---|
| DECIMALS | <50 ±0.1 | <50 ±0.15 | <50 ±0.2 | <30° ±0.1° | |
| ±0.3 | >50~100 ±0.15 | >50~100 ±0.2 | >50~100 ±0.25 | >30°~60° ±0.3° | |
| ±0.2 | >100~200 ±0.2 | >100~200 ±0.25 | >100~200 ±0.3 | >60°~90° ±0.5° | |
| X.XX ±0.1 | >200~ ±0.2% | >200~ ±0.25% | >200~ ±0.3% | | |

DESCRIPTION: CONFIDENTIAL
MOTOR_F86

A3 SIZE | THIRD ANGLE PROJECTION | PART NO.: | REV.

USED ON | UNIT mm | SCALE | SHEET 1 OF1 | 00

Pobrano z: https://automatyka-sklep.eu/serwosilnik-bez-hamulca-delta-electronics-3-18nm-1000w-3000-obrmin-ecma-c10910cs

FRAME NAME: DF-MEA3H-3R02.DWG