



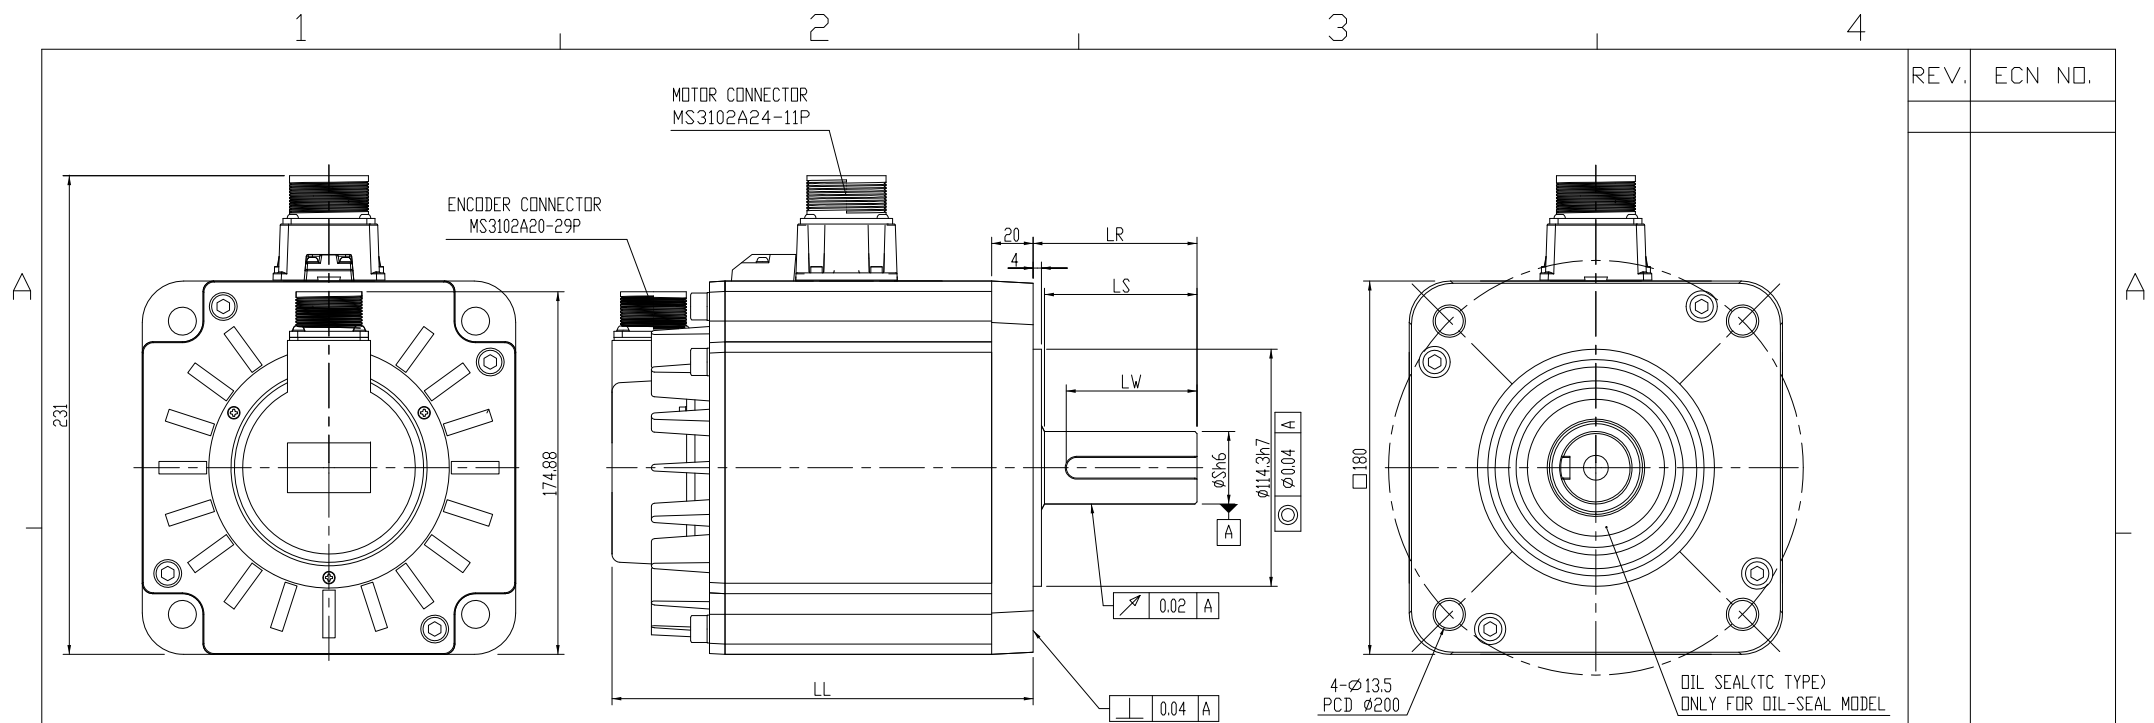

DIMENSION TABLE (MODEL WITH BRAKE)

MODEL	LL	LR	LS	S	LW	WK	W	T	RH	TP			
ECMA-E □1820BS	203.1	79	73	35	---	---	---	---	---	M12, Depth 25			
ECMA-E □1820DS													
ECMA-E □1820QS					63	10	10	8	30				
ECMA-E □1820SS													
ECMA-F □1830BS	235.3							---	---		---	---	---
ECMA-F □1830DS													
ECMA-F □1830QS					63	10	10	8	30				
ECMA-F □1830SS													
ECMA-E □1830BS								---	---		---	---	
ECMA-E □1830DS													
ECMA-E □1830QS					63	10	10	8	30				
ECMA-E □1830SS													
ECMA-E □1835BS	279.3							---	---		---	---	---
ECMA-E □1835DS													
ECMA-E □1835QS					63	10	10	8	30				
ECMA-E □1835SS													
ECMA-F □1845BS								---	---		---	---	
ECMA-F □1845DS													
ECMA-F □1845QS					63	10	10	8	30				
ECMA-F □1845SS													

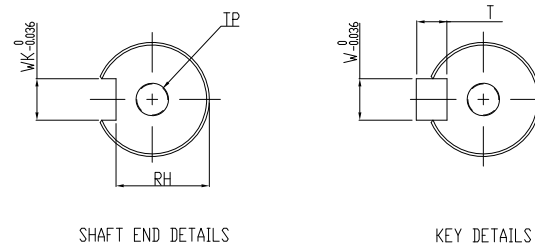

Pobrano z: <https://automatyka-sklep.eu/serwosilnik-z-hamulcem-delta-electronics-14-32nm-3000w-2000-obrmin-ecma-e11830qs>

		台達電子工業股份有限公司 DELTA ELECTRONICS, INC.		DRAWN:	DESIGN:
				APPROVE:	DATE: 10/21/2013
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DELTA ELECTRONICS, INC. AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SELL OF APPARATUSES OR DEVICES WITHOUT PERMISSION.		DIMENSIONAL TOLERANCES			
		() () () () () DECIMALS <50 +0.1 <50 +0.15 <50 +0.2 <30' +0.1" +0.3 >50~100 +0.15 >50~100 +0.2 >50~100 +0.25 >30'~60' +0.3" +0.2 >100~200 +0.2 >100~200 +0.25 >100~200 +0.3 >60'~90' +0.5" +0.1 >200+ +0.25% >200+ +0.25% >200+ +0.3%			
DESCRIPTION: CONFIDENTIAL MOTOR_F180_15~4.5KW_BRAKE		A3 SIZE	 THIRD ANGLE PROJECTION	PART NO.:	REV.
USED ON		UNIT	mm	SCALE	SHEET 1 OF 1
					00