



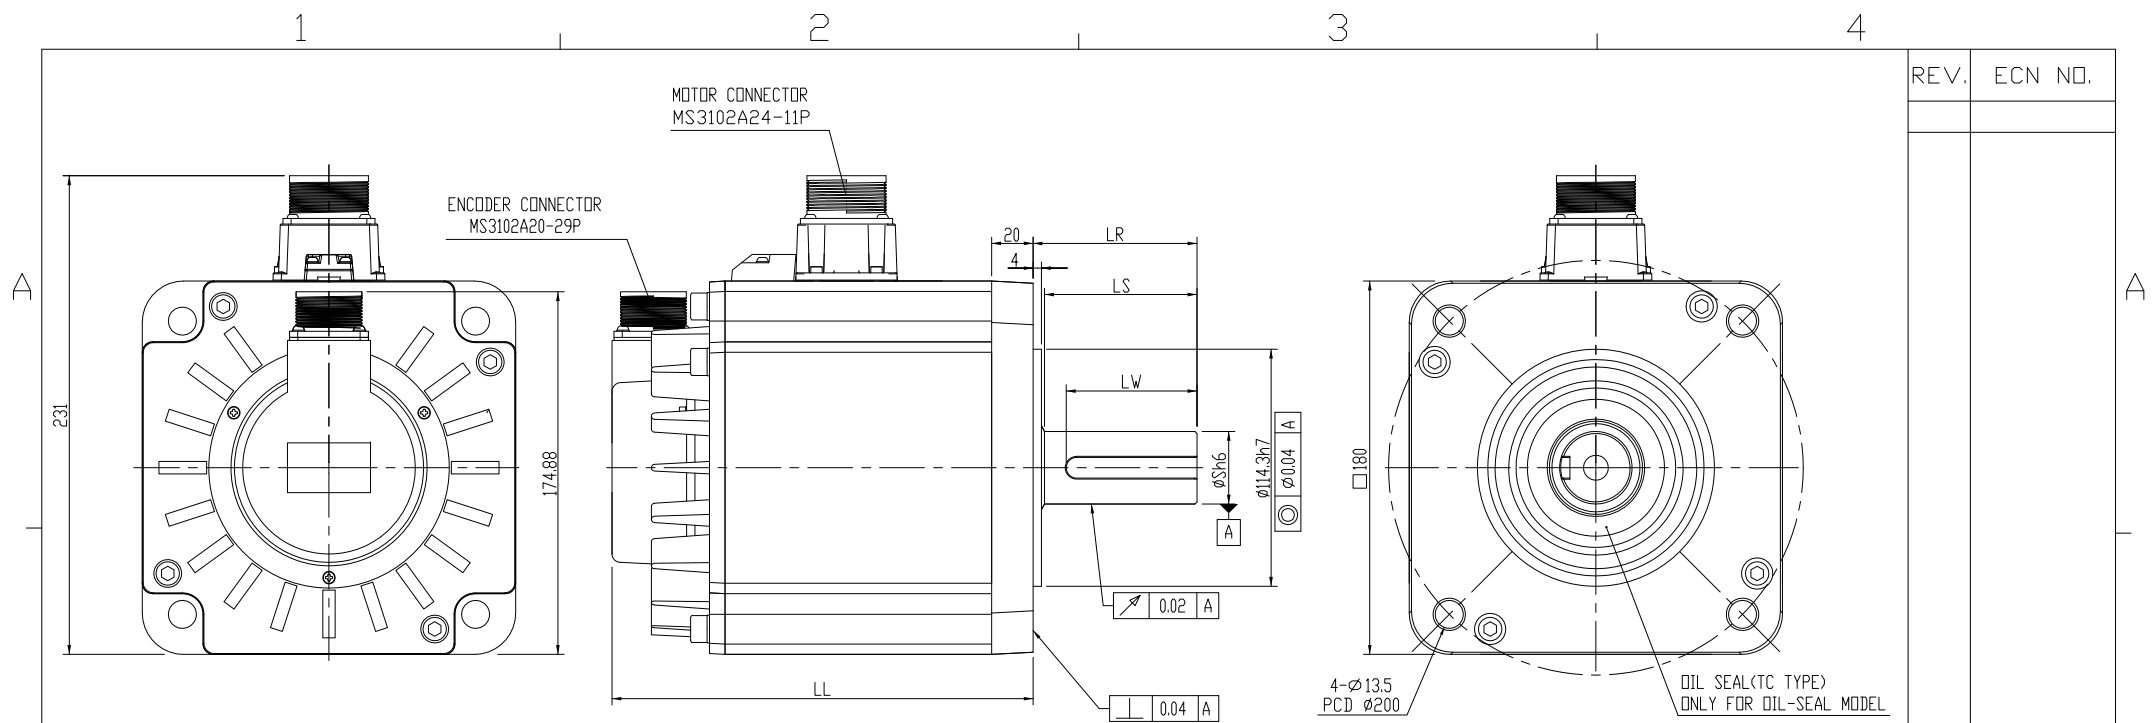

DIMENSION TABLE (MODEL WITH BRAKE)

MODEL	LL	LR	LS	S	LW	WK	W	T	RH	TP
ECMA-E□1820BS	203.1	79	73	35	---	---	---	---	---	M12, Depth 25
ECMA-E□1820DS										
ECMA-E□1820QS					63	10	10	8	30	
ECMA-E□1820SS										
ECMA-F□1830BS	---				---	---	---	---		
ECMA-F□1830DS										
ECMA-F□1830QS	63				10	10	8	30		
ECMA-F□1830SS										
ECMA-E□1830BS	---				---	---	---	---		
ECMA-E□1830DS										
ECMA-E□1830QS	63				10	10	8	30		
ECMA-E□1830SS										
ECMA-E□1835BS	---				---	---	---	---		
ECMA-E□1835DS										
ECMA-E□1835QS	63				10	10	8	30		
ECMA-E□1835SS										
ECMA-F□1845BS	279.3				---	---	---	---	---	
ECMA-F□1845DS										
ECMA-F□1845QS		63	10	10	8	30				
ECMA-F□1845SS										

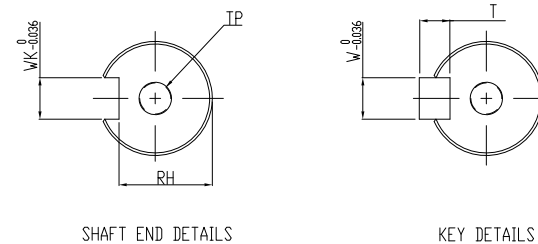

Pobrano z: <https://automatyka-sklep.eu/serwosilnik-z-hamulcem-delta-electronics-19-1nm-3000w-1500-obrmin-ecma-f11830ds>

 台達電子工業股份有限公司 DELTA ELECTRONICS INC.		DRAWN:		DESIGN:	
		APPROVE:		DATE: 10/21/2013	
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DELTA ELECTRONICS, INC. AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SELL OF APPARATUS OR DEVICES WITHOUT PERMISSION.		DIMENSIONAL TOLERANCES			
		() () () () ANGLES			
		DECIMALS <50 ±0.1 <50 ±0.15 <50 ±0.2 <30° ±0.1° ±0.3 >50-100 ±0.15 >50-100 ±0.2 >50-100 ±0.25 >30° ±0.04° ±0.2 >100-200 ±0.2 >100-200 ±0.25 >100-200 ±0.3 >60° ±0.05° ±0.1 ≥200 ±0.2 ≥200 ±0.25 ≥200 ±0.3			
DESCRIPTION: CONFIDENTIAL MOTOR_F180_15~4.5KW_BRAKE		A3		PART NO.:	REV.
UNIT		SIZE	THIRD ANGLE PROJECTION	00	
USED ON	mm	SCALE	SHEET 1 Of 1		