

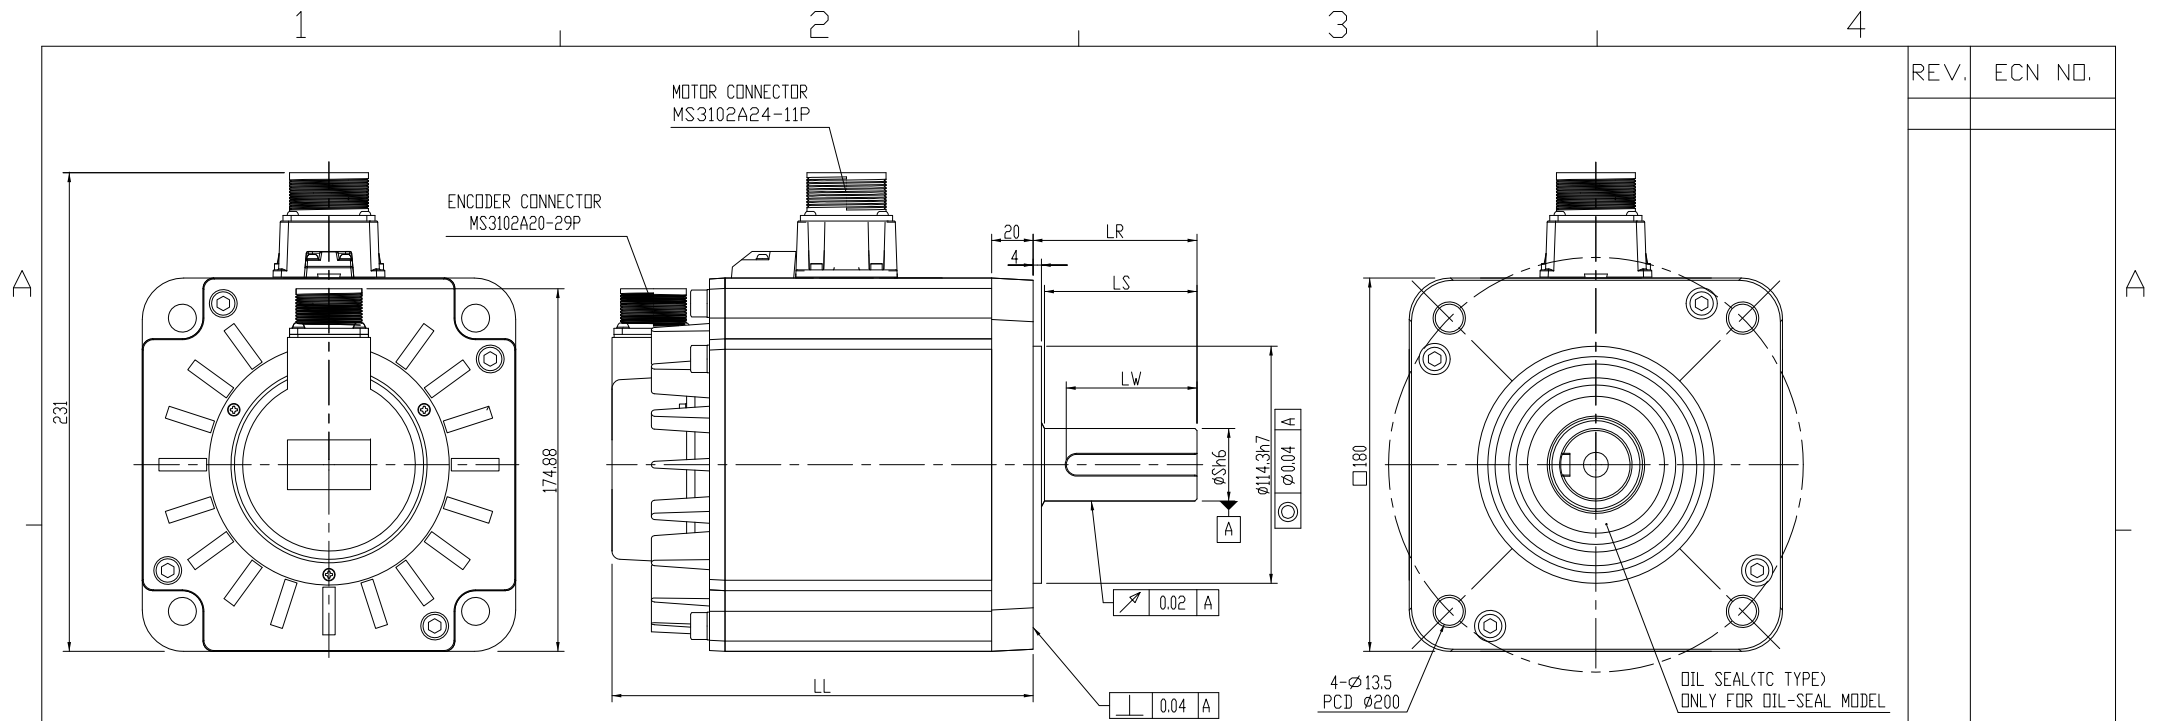




DIMENSION TABLE (MODEL WITH BRAKE)

MODEL	LL	LR	LS	S	LW	WK	W	T	RH	TP
ECMA-E□1820BS	203.1				---	---	---	---	---	M12, Depth 25
ECMA-E□1820DS					---	---	---	---	---	
ECMA-E□1820QS					63	10	10	8	30	
ECMA-E□1820SS					---	---	---	---	---	
ECMA-F□1830BS	235.3	79	73	35	---	---	---	---	---	
ECMA-F□1830DS					---	---	---	---	---	
ECMA-F□1830QS					63	10	10	8	30	
ECMA-F□1830SS					---	---	---	---	---	
ECMA-E□1830BS					---	---	---	---	---	
ECMA-E□1830DS					---	---	---	---	---	
ECMA-E□1830QS					63	10	10	8	30	
ECMA-E□1830SS					---	---	---	---	---	
ECMA-E□1835BS	279.3				---	---	---	---	---	
ECMA-E□1835DS					---	---	---	---	---	
ECMA-E□1835QS					63	10	10	8	30	
ECMA-E□1835SS					---	---	---	---	---	
ECMA-F□1845BS					---	---	---	---	---	
ECMA-F□1845DS					---	---	---	---	---	
ECMA-F□1845QS					63	10	10	8	30	
ECMA-F□1845SS					---	---	---	---	---	



Pobrano z: <https://automatyka-sklep.eu/serwosilnik-z-hamulcem-delta-electronics-19-1nm-3000w-1500-obrmin-ecma-f11830ss>

台達電子工業股份有限公司 DELTA ELECTRONICS, INC.		DRAWN:		DESIGN:	
APPROVE:		DATE: 10/21/2013			
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DELTA ELECTRONICS, INC. AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SELL OF APPARATUS OR DEVICES WITHOUT PERMISSION.					
DESCRIPTION: CONFIDENTIAL MOTOR_F180_1.5~4.5KW_BRAKE		DIMENSIONAL TOLERANCES DECIMALS <50 ±0.1 <50 ±0.15 <50 ±0.2 <30° ±0.1° ±0.3 >50~100 ±0.15 >50~100 ±0.2 >50~100 ±0.25 >30°~60° ±0.3° ±0.2 >100~200 ±0.2 >100~200 ±0.25 >100~200 ±0.3 >60°~90° ±0.5° ±0.1 >200~ ±0.2% >200~ ±0.25% >200~ ±0.3%		ANGLES PART NO.:	
USED ON:		A3 SIZE THIRD ANGLE PROJECTION		REV. 00	
UNIT: mm		SCALE:		SHEET 1 OF 1	