


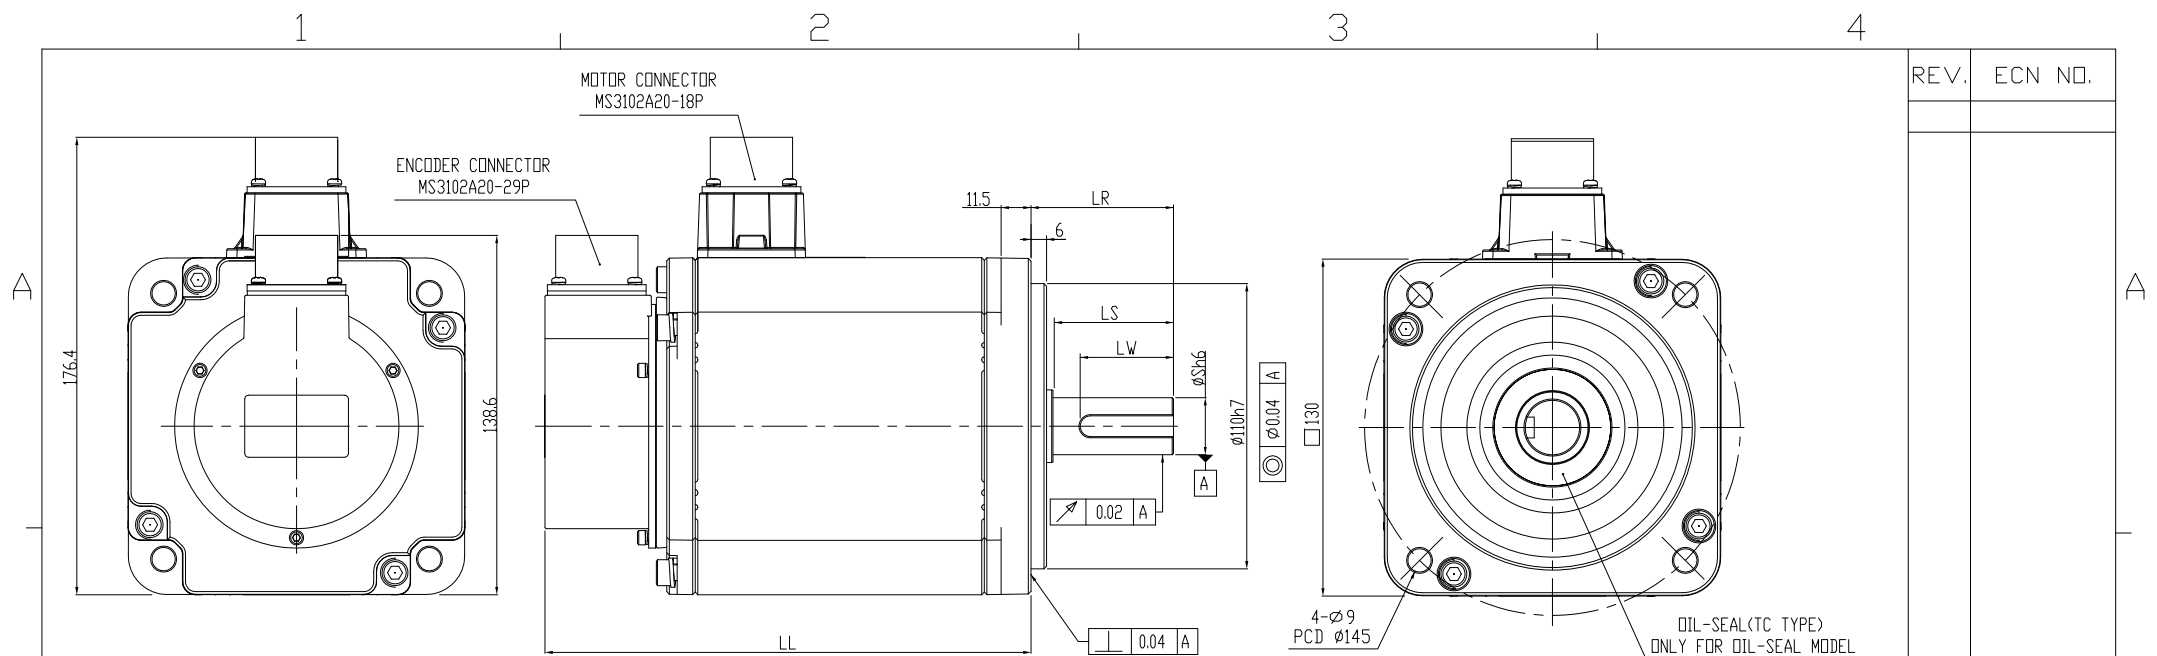

DIMENSION TABLE (MODEL WITHOUT BRAKE)

| MODEL         | LL    | LR  | LS  | S   | LW  | WK  | W            | T   | RH           | TP           |
|---------------|-------|-----|-----|-----|-----|-----|--------------|-----|--------------|--------------|
| ECMA-G 1303CS | 147.5 | 55  | 47  | 22  | --- | --- | ---          | --- | ---          | M6, Depth 20 |
| ECMA-G 1303ES |       |     |     |     | 36  | 8   | 8            | 7   | 18           | ---          |
| ECMA-G 1303PS |       |     |     |     | 36  | 8   | 8            | 7   | 18           | M6, Depth 20 |
| ECMA-G 1303RS |       |     |     |     | --- | --- | ---          | --- | ---          | M6, Depth 20 |
| ECMA-E 1305CS |       |     |     |     | 36  | 8   | 8            | 7   | 18           | ---          |
| ECMA-E 1305ES |       |     |     |     | 36  | 8   | 8            | 7   | 18           | M6, Depth 20 |
| ECMA-E 1305PS |       |     |     |     | --- | --- | ---          | --- | ---          | M6, Depth 20 |
| ECMA-E 1305RS |       |     |     |     | 36  | 8   | 8            | 7   | 18           | ---          |
| ECMA-G 1306CS |       |     |     |     | 36  | 8   | 8            | 7   | 18           | M6, Depth 20 |
| ECMA-G 1306ES |       |     |     |     | --- | --- | ---          | --- | ---          | M6, Depth 20 |
| ECMA-G 1306PS | 36    |     |     |     | 8   | 8   | 7            | 18  | ---          |              |
| ECMA-G 1306RS | 36    |     |     |     | 8   | 8   | 7            | 18  | M6, Depth 20 |              |
| ECMA-G 1309CS | 163.5 |     |     |     | --- | --- | ---          | --- | ---          | M6, Depth 20 |
| ECMA-G 1309ES |       |     |     |     | 36  | 8   | 8            | 7   | 18           | ---          |
| ECMA-G 1309PS |       |     |     |     | 36  | 8   | 8            | 7   | 18           | M6, Depth 20 |
| ECMA-G 1309RS |       |     |     |     | --- | --- | ---          | --- | ---          | M6, Depth 20 |
| ECMA-E 1310CS | 147.5 |     |     |     | --- | --- | ---          | --- | ---          | M6, Depth 20 |
| ECMA-E 1310ES |       |     |     |     | 36  | 8   | 8            | 7   | 18           | ---          |
| ECMA-E 1310PS |       |     |     |     | 36  | 8   | 8            | 7   | 18           | M6, Depth 20 |
| ECMA-E 1310RS |       |     |     |     | --- | --- | ---          | --- | ---          | M6, Depth 20 |
| ECMA-E 1315CS | 167.5 |     |     |     | --- | --- | ---          | --- | ---          | M6, Depth 20 |
| ECMA-E 1315ES |       |     |     |     | 36  | 8   | 8            | 7   | 18           | ---          |
| ECMA-E 1315PS |       |     |     |     | 36  | 8   | 8            | 7   | 18           | M6, Depth 20 |
| ECMA-E 1315RS |       |     |     |     | --- | --- | ---          | --- | ---          | M6, Depth 20 |
| ECMA-E 1320CS | 187.5 |     |     |     | --- | --- | ---          | --- | ---          | M6, Depth 20 |
| ECMA-E 1320ES |       |     |     |     | 36  | 8   | 8            | 7   | 18           | ---          |
| ECMA-E 1320PS |       | 36  | 8   | 8   | 7   | 18  | M6, Depth 20 |     |              |              |
| ECMA-E 1320RS |       | --- | --- | --- | --- | --- | M6, Depth 20 |     |              |              |

| MODEL         | LL    | LR | LS | S  | LW  | WK  | W   | T   | RH  | TP           |
|---------------|-------|----|----|----|-----|-----|-----|-----|-----|--------------|
| ECMA-C 1330C4 | 187.5 | 55 | 47 | 24 | --- | --- | --- | --- | --- | M6, Depth 20 |
| ECMA-C 1330E4 |       |    |    |    | 36  | 8   | 8   | 7   | 20  | ---          |
| ECMA-C 1330P4 |       |    |    |    | 36  | 8   | 8   | 7   | 20  | M6, Depth 20 |
| ECMA-C 1330R4 |       |    |    |    | --- | --- | --- | --- | --- | M6, Depth 20 |

Pobrano z: <https://automatyka-sklep.eu/serwosilnik-bez-hamulca-delta-electronics-8-59nm-900w-1000-obrmin-ecma-g11309es>

|                                                                                                                                                                                                          |  |           |                  |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|-----------|------------------|
|  <b>台達電子工業股份有限公司</b><br><b>DELTA ELECTRONICS, INC.</b>                                                              |  | DRAWN:    | DESIGN:          |
| THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DELTA ELECTRONICS, INC. AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SELL OF APPARATUSES OR DEVICES WITHOUT PERMISSION. |  | APPROVE:  | DATE: 06/14/2017 |
| DESCRIPTION: MOTOR_F130                                                                                                                                                                                  |  | PART NO.: |                  |
| USED ON:                                                                                                                                                                                                 |  | UNIT: mm  | SHEET 1 OF 1     |