



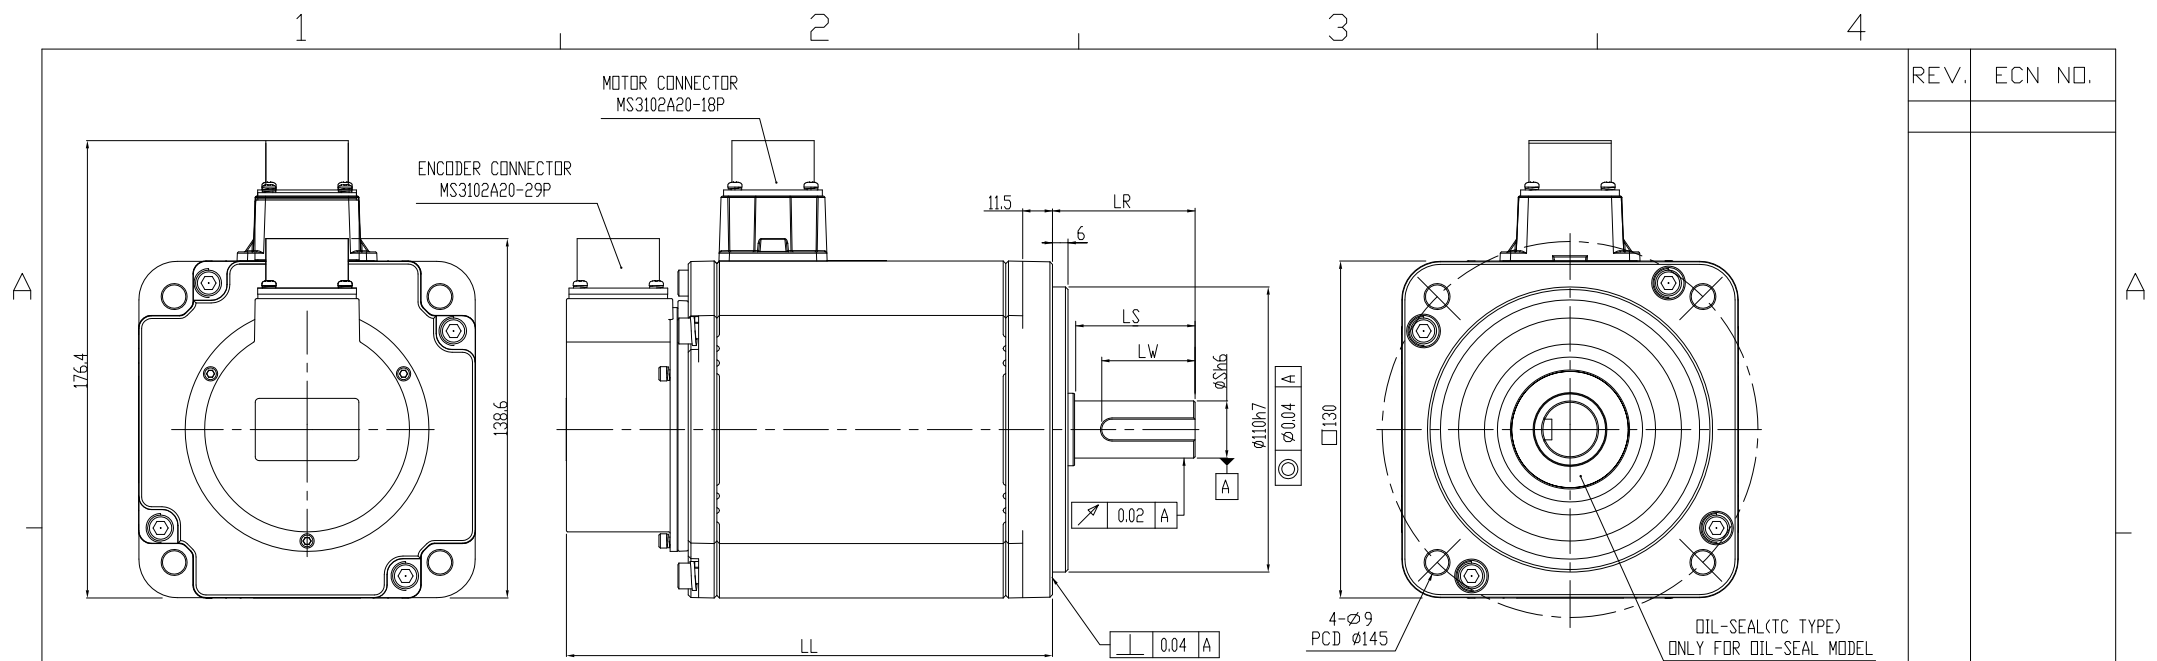

DIMENSION TABLE (MODEL WITHOUT BRAKE)

MODEL	LL	LR	LS	S	LW	WK	W	T	RH	TP		
ECMA-M _□ 1309CS	163.5	55	47	22	---	---	---	---	---	M6, Depth 20		
ECMA-M _□ 1309ES					36	8	8	7	18	---		
ECMA-M _□ 1309PS					36	8	8	7	18	M6, Depth 20		
ECMA-M _□ 1309RS					36	8	8	7	18	---		
ECMA-K _□ 1310CS	---				---	---	---	---	M6, Depth 20			
ECMA-K _□ 1310ES	36				8	8	7	18	---			
ECMA-K _□ 1310PS	36				8	8	7	18	M6, Depth 20			
ECMA-K _□ 1310RS	36				8	8	7	18	---			
ECMA-K _□ 1315CS	---				---	---	---	---	M6, Depth 20			
ECMA-K _□ 1315ES	36				8	8	7	18	---			
ECMA-K _□ 1315PS	36				8	8	7	18	M6, Depth 20			
ECMA-K _□ 1315RS	36				8	8	7	18	---			
ECMA-K _□ 1320CS	---				---	---	---	---	M6, Depth 20			
ECMA-K _□ 1320ES	36				8	8	7	18	---			
ECMA-K _□ 1320PS	36				8	8	7	18	M6, Depth 20			
ECMA-K _□ 1320RS	36				8	8	7	18	---			
ECMA-J _□ 1330C4	187.5			55	47	24	---	---	---	---	---	M6, Depth 20
ECMA-J _□ 1330E4							36	8	8	7	20	---
ECMA-J _□ 1330P4							36	8	8	7	20	M6, Depth 20
ECMA-J _□ 1330R4							36	8	8	7	20	M6, Depth 20

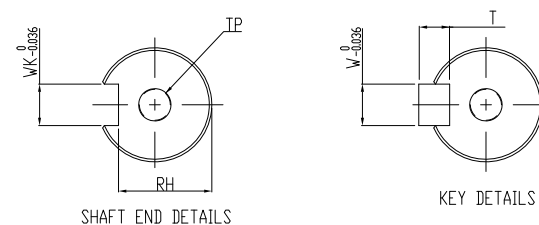

Pobrano z: <https://automatyka-sklep.eu/serwosilnik-bez-hamulca-delta-electronics-9-55nm-3000w-3000-obrmin-ecma-j11330r4>

 台達電子工業股份有限公司 DELTA ELECTRONICS, INC.		DRAWN:	DESIGN:
APPROVE:		DATE: 06/14/2017	
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DELTA ELECTRONICS, INC. AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SELL OF APPARATUS OR DEVICES WITHOUT PERMISSION.		DIMENSIONAL TOLERANCES () () () () ANGLES DECIMALS <50 ±0.1 <50 ±0.15 <50 ±0.2 <30° ±0.1° X ±0.3 >50-100 ±0.15 >100-200 ±0.2 >200-400 ±0.25 >400-600 ±0.3 >600-900 ±0.5 X.X ±0.2 >100-200 ±0.2 >200-400 ±0.25 >400-600 ±0.3 >600-900 ±0.5 X.XX ±0.1 >200 ±0.2 >200 ±0.25 >200 ±0.3	
DESCRIPTION: CONFIDENTIAL MOTOR_F130_380V		PART NO.:	
USED ON	UNIT	mm	SHEET 1 OF 1

REV. 01