



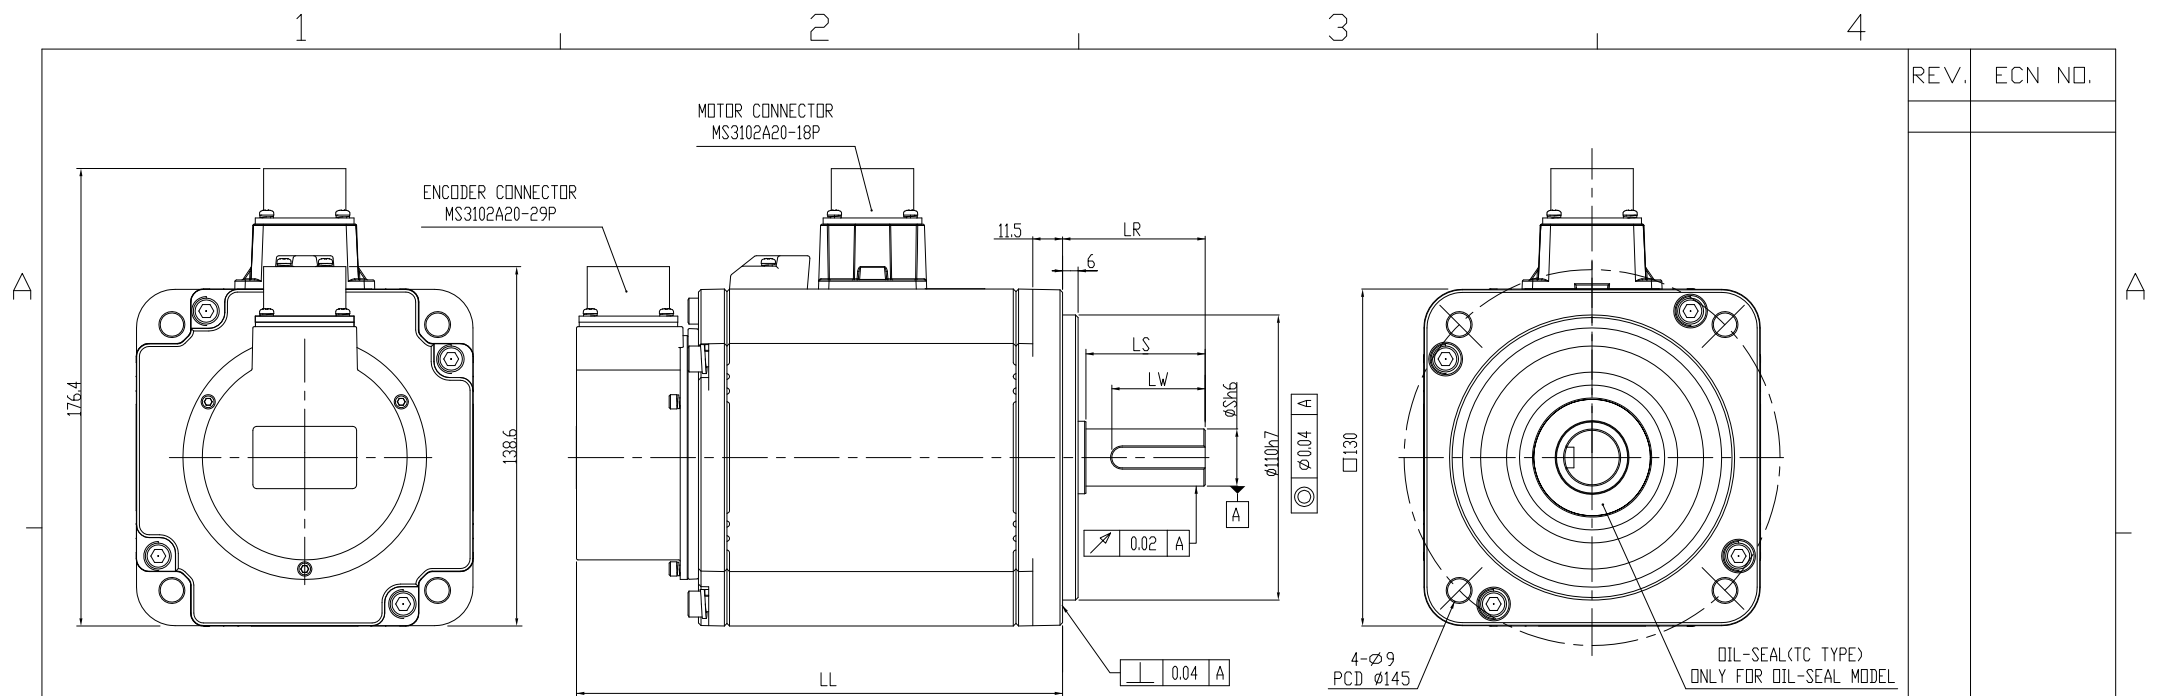

DIMENSION TABLE (MODEL WITHOUT BRAKE)

MODEL	LL	LR	LS	S	LW	WK	W	T	RH	TP
ECMA-M ₀ 1309DS	198	55	47	22	---	---	---	---	---	M6, Depth 20
ECMA-M ₀ 1309FS					36	8	8	7	18	---
ECMA-M ₀ 1309QS					36	8	8	7	18	M6, Depth 20
ECMA-M ₀ 1309SS					---	---	---	---	---	M6, Depth 20
ECMA-K ₀ 1310DS	183.5				---	---	---	---	---	M6, Depth 20
ECMA-K ₀ 1310FS					36	8	8	7	18	---
ECMA-K ₀ 1310QS					36	8	8	7	18	M6, Depth 20
ECMA-K ₀ 1310SS					---	---	---	---	---	M6, Depth 20
ECMA-K ₀ 1315DS	202				---	---	---	---	---	M6, Depth 20
ECMA-K ₀ 1315FS					36	8	8	7	18	---
ECMA-K ₀ 1315QS					36	8	8	7	18	M6, Depth 20
ECMA-K ₀ 1315SS					---	---	---	---	---	M6, Depth 20
ECMA-K ₀ 1320DS	216				---	---	---	---	---	M6, Depth 20
ECMA-K ₀ 1320FS					36	8	8	7	18	---
ECMA-K ₀ 1320QS					36	8	8	7	18	M6, Depth 20
ECMA-K ₀ 1320SS					---	---	---	---	---	M6, Depth 20
ECMA-J ₀ 1330D4	216	55	47	24	---	---	---	---	---	M6, Depth 20
ECMA-J ₀ 1330F4					36	8	8	7	20	---
ECMA-J ₀ 1330Q4					36	8	8	7	20	M6, Depth 20
ECMA-J ₀ 1330S4					---	---	---	---	---	M6, Depth 20

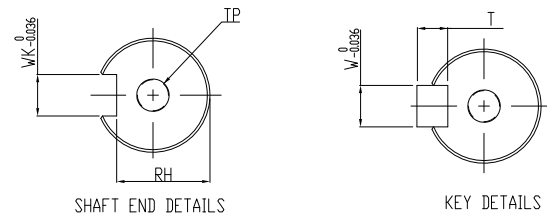

Pobrano z: <https://automatyka-sklep.eu/serwosilnik-z-hamulcem-delta-electronics-7-16nm-1500w-2000-obrmin-ecma-k11315ds>

 台達電子工業股份有限公司 DELTA ELECTRONICS, INC.		DRAWN:	DESIGN:
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DELTA ELECTRONICS, INC. AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SELL OF APPARATUS OR DEVICES WITHOUT PERMISSION.		APPROVE:	DATE: 06/14/2017
DESCRIPTION: MOTOR_F130_380V_BRAKE		PART NO.:	
USED ON:		UNIT: mm	SHEET 1 OF 1