

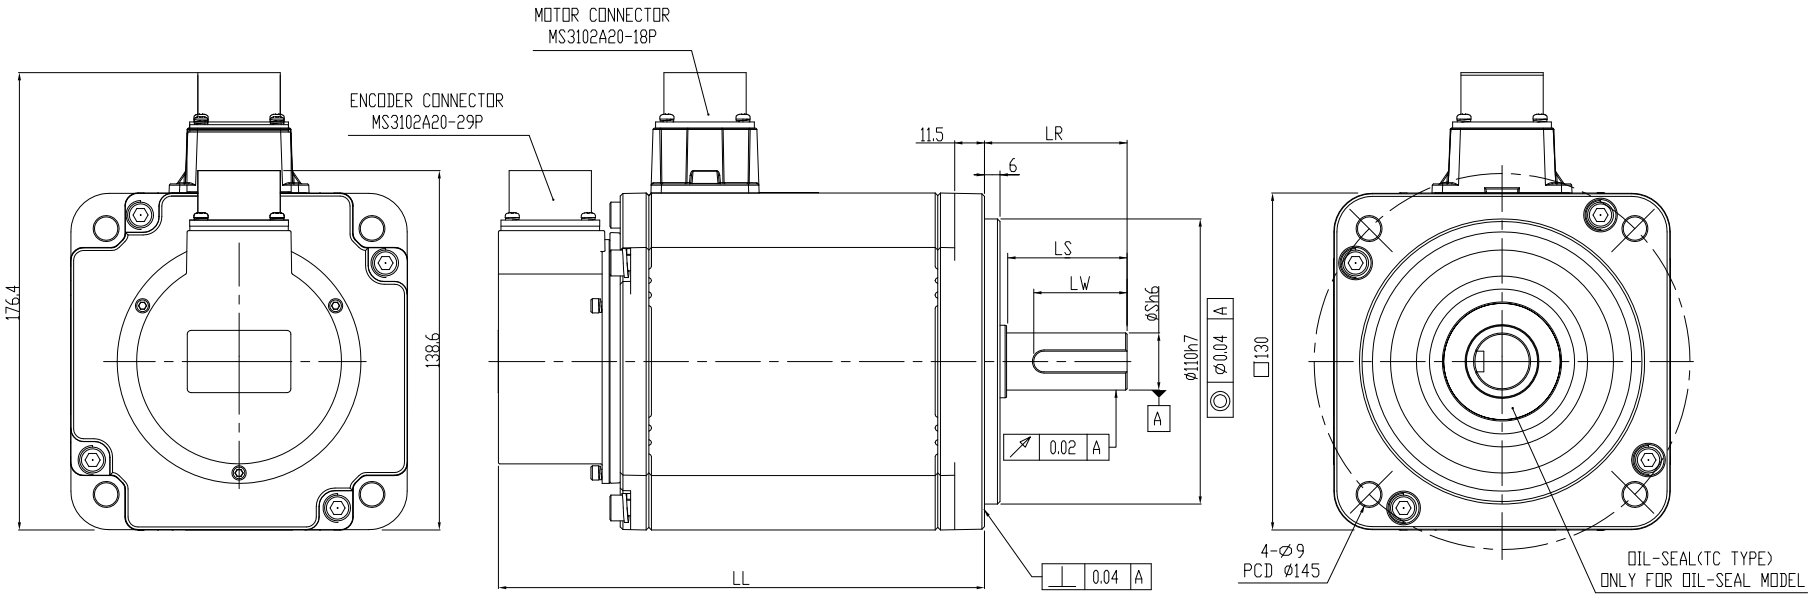


DIMENSION TABLE (MODEL WITHOUT BRAKE)

MODEL	LL	LR	LS	S	LW	WK	W	T	RH	TP
ECMA-M□ 1309CS	163.5	55	47	22	---	---	---	---	---	M6, Depth 20
ECMA-M□ 1309ES					36	8	8	7	18	---
ECMA-M□ 1309PS					36	8	8	7	18	M6, Depth 20
ECMA-M□ 1309RS										
ECMA-K□ 1310CS	147.5				---	---	---	---	---	M6, Depth 20
ECMA-K□ 1310ES					36	8	8	7	18	---
ECMA-K□ 1310PS					36	8	8	7	18	M6, Depth 20
ECMA-K□ 1310RS										
ECMA-K□ 1315CS	167.5				---	---	---	---	---	M6, Depth 20
ECMA-K□ 1315ES					36	8	8	7	18	---
ECMA-K□ 1315PS					36	8	8	7	18	M6, Depth 20
ECMA-K□ 1315RS										
ECMA-K□ 1320CS	187.5				---	---	---	---	---	M6, Depth 20
ECMA-K□ 1320ES					36	8	8	7	18	---
ECMA-K□ 1320PS					36	8	8	7	18	M6, Depth 20
ECMA-K□ 1320RS										
ECMA-J□ 1330C4	187.5	55	47	24	---	---	---	---	---	M6, Depth 20
ECMA-J□ 1330E4					36	8	8	7	20	---
ECMA-J□ 1330P4					36	8	8	7	20	M6, Depth 20
ECMA-J□ 1330R4										



SHAFT END DETAILS



KEY DETAILS

REV.	ECN NO.

台達電子工業股份有限公司
DELTA ELECTRONICS, INC.

DRAWN: | DESIGN:
APPROVE: | DATE: 06/14/2017

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DELTA ELECTRONICS, INC. AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOE THE MANUFACTURE OR SELL OF APPARATUSES OR DEVICES WITHOUT PERMISSION.

DIMENSIONAL TOLERANCES

	( )	( )	( )	( )	ANGLES
DECIMALS	<50 ±0.1	<50 ±0.15	<50 ±0.2	<30' ±0.1°	
X	±0.3	>50~100 ±0.15	>50~100 ±0.2	>50~100 ±0.25	>30'~60' ±0.3°
X.X	±0.2	>100~200 ±0.2	>100~200 ±0.25	>100~200 ±0.3	>60'~90' ±0.5°
X.XX	±0.1	>200~ ±0.2%	>200~ ±0.25%	>200~ ±0.3%	

DESCRIPTION: CONFIDENTIAL
MOTOR_F130_380V

A3 SIZE | THIRD ANGLE PROJECTION | PART NO.: | REV. 01

USED ON | UNIT mm | SCALE | SHEET 1 OF1

Pobrano z: https://automatyka-sklep.eu/serwosilnik-bez-hamulca-delta-electronics-7-16nm-1500w-2000-obrmin-ecma-k11315rs

FRAME NAME: DF-MEA3H-3R02.DWG