



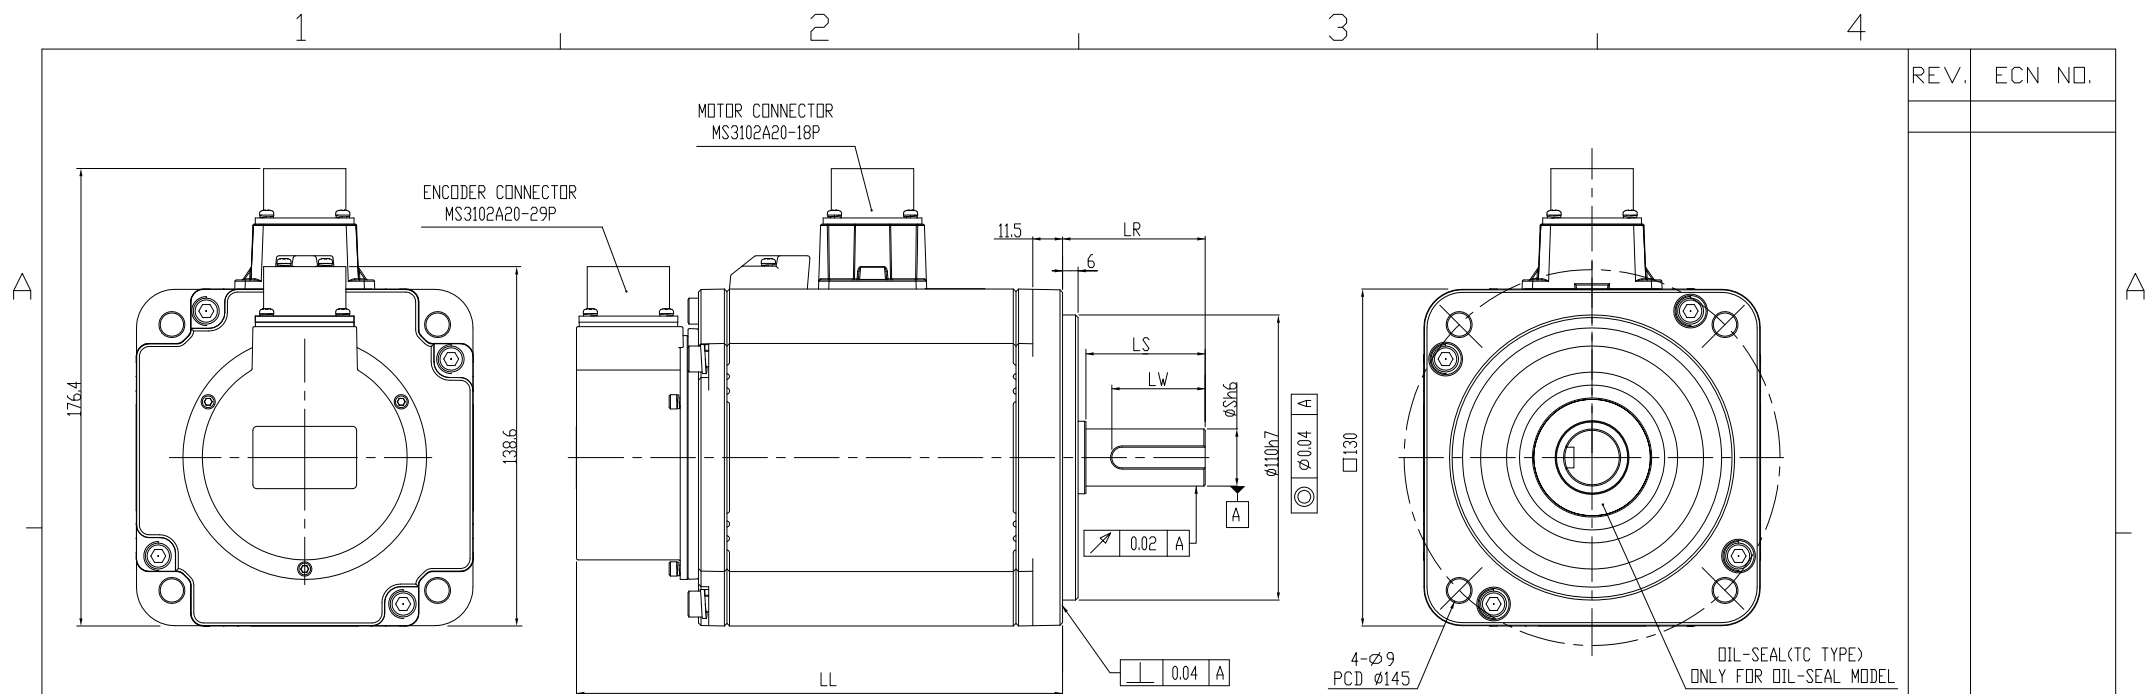

DIMENSION TABLE (MODEL WITHOUT BRAKE)

MODEL	LL	LR	LS	S	LW	WK	W	T	RH	TP
ECMA-M ₀ 1309DS	198	55	47	22	---	---	---	---	---	M6, Depth 20
ECMA-M ₀ 1309FS					36	8	8	7	18	---
ECMA-M ₀ 1309QS					36	8	8	7	18	M6, Depth 20
ECMA-M ₀ 1309SS					---	---	---	---	---	M6, Depth 20
ECMA-K ₀ 1310DS	36				8	8	7	18	---	
ECMA-K ₀ 1310FS	36				8	8	7	18	M6, Depth 20	
ECMA-K ₀ 1310QS	---				---	---	---	---	M6, Depth 20	
ECMA-K ₀ 1310SS	36				8	8	7	18	---	
ECMA-K ₀ 1315DS	36				8	8	7	18	M6, Depth 20	
ECMA-K ₀ 1315FS	---				---	---	---	---	M6, Depth 20	
ECMA-K ₀ 1315QS	36				8	8	7	18	---	
ECMA-K ₀ 1315SS	36				8	8	7	18	M6, Depth 20	
ECMA-K ₀ 1320DS	---				---	---	---	---	M6, Depth 20	
ECMA-K ₀ 1320FS	36				8	8	7	18	---	
ECMA-K ₀ 1320QS	36				8	8	7	18	M6, Depth 20	
ECMA-K ₀ 1320SS	---				---	---	---	---	M6, Depth 20	
ECMA-J ₀ 1330D4	216	55	47	24	---	---	---	---	---	M6, Depth 20
ECMA-J ₀ 1330F4					36	8	8	7	20	---
ECMA-J ₀ 1330Q4					36	8	8	7	20	M6, Depth 20
ECMA-J ₀ 1330S4										

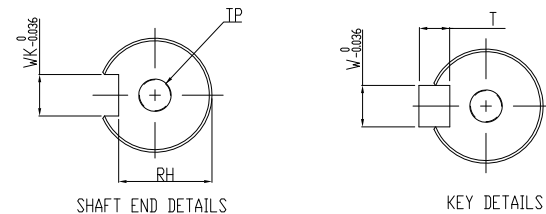

Pobrano z: <https://automatyka-sklep.eu/serwosilnik-z-hamulcem-delta-electronics-7-16nm-1500w-2000-obrmin-ecma-k11315ss>

 台達電子工業股份有限公司 DELTA ELECTRONICS, INC.		DRAWN: _____ APPROVE: _____		DESIGN: _____ DATE: 06/14/2017	
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DELTA ELECTRONICS, INC. AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SELL OF APPARATUSSES OR DEVICES WITHOUT PERMISSION.					
DIMENSIONAL TOLERANCES () () () () () ANGLES DECIMALS <50 +0.1 <50 +0.15 <50 +0.2 <30° +0.1° X +0.3 >50-100 +0.15 >50-100 +0.2 >50-100 +0.25 >30°-60+0.3° X,X.X +0.2 >100-200+0.2 >100-200+0.25 >100-200+0.3 >60°-90+0.5° X,X.XX+0.1 >200+0.2 >200+0.25 >200+0.3					
DESCRIPTION: CONFIDENTIAL MOTOR_F130_380V_BRAKE		A3 SIZE  THIRD ANGLE PROJECTION		PART NO.: _____ REV. _____	
USED ON _____		UNIT mm		SCALE _____ SHEET 1 OF 1	
				01	