



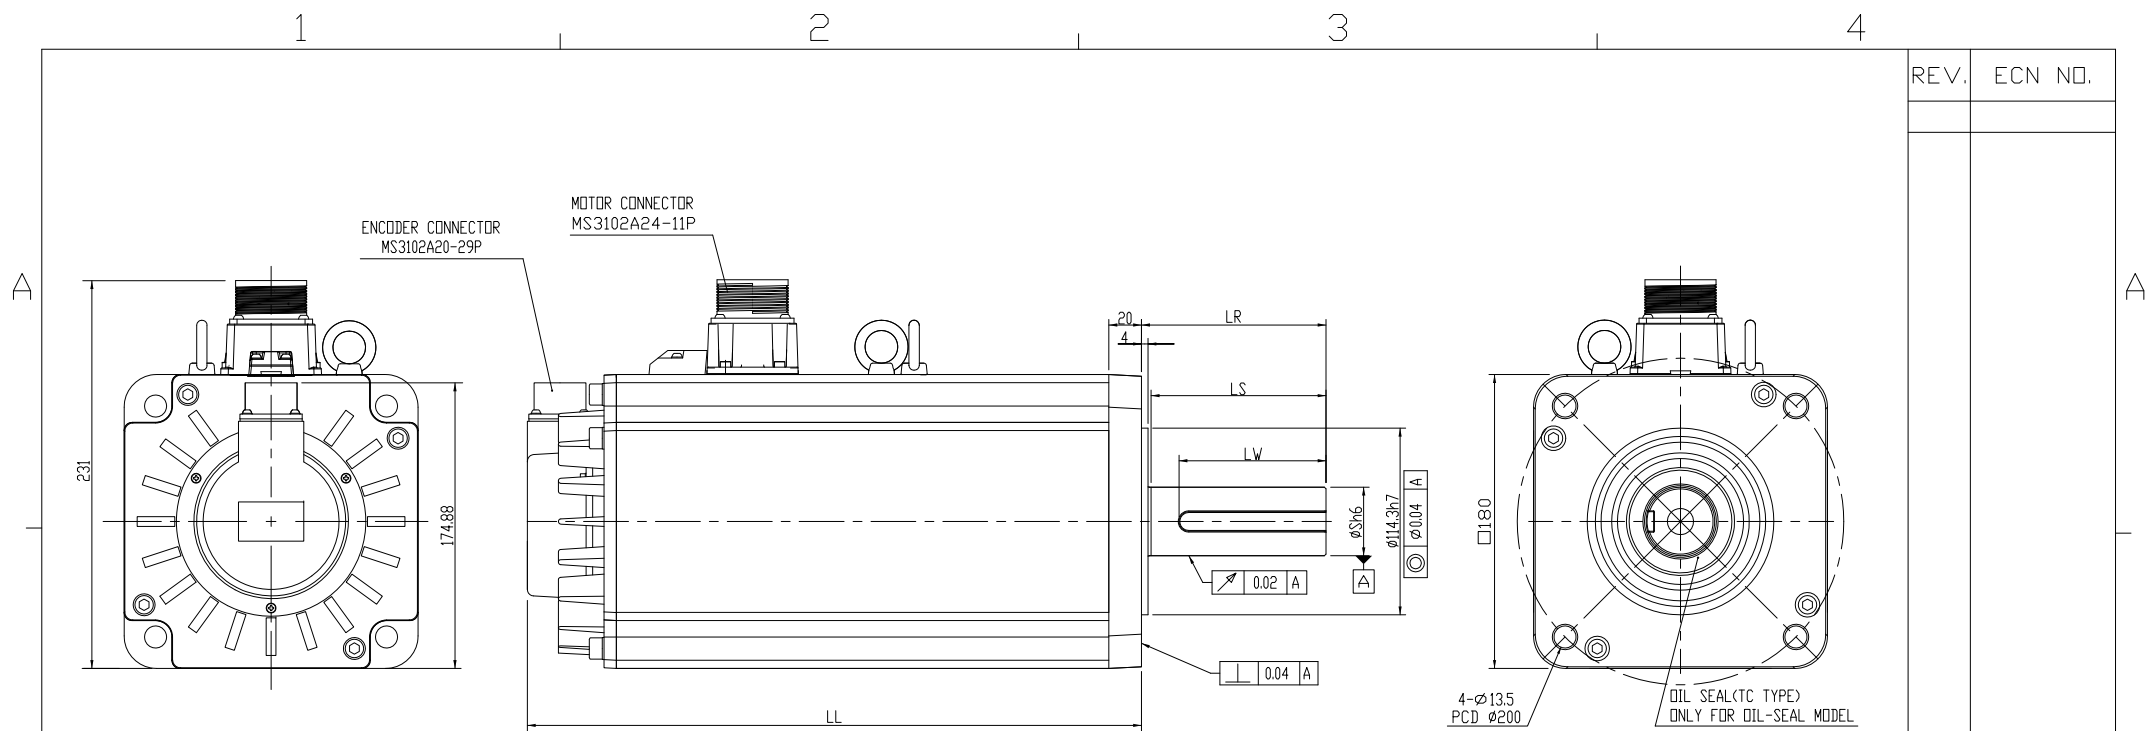


DIMENSION TABLE (MODEL WITH BRAKE)

MODEL	LL	LR	LS	S	LW	WK	W	T	RH	TP
ECMA-L □1855B3	311.7	113	108.5	42	---	---	---	---	---	M16, Depth 32
ECMA-L □1855D3					90	12	12	8	37	
ECMA-L □1855Q3					---	---	---	---	---	
ECMA-L □1855S3					---	---	---	---	---	
ECMA-L □1875B3	376.1				---	---	---	---	---	
ECMA-L □1875D3					90	12	12	8	37	
ECMA-L □1875Q3					---	---	---	---	---	
ECMA-L □1875S3					---	---	---	---	---	



SHAFT END DETAILS



KEY DETAILS

Pobrano z: <https://automatyka-sklep.eu/serwosilnik-z-hamulcem-delta-electronics-47-74nm-7500w-1500-obrmin-ecma-l11875q3>

 台達電子工業股份有限公司 DELTA ELECTRONICS, INC.		DRAWN: _____ APPROVE: _____		DESIGN: _____ DATE: 10/21/2013	
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DELTA ELECTRONICS, INC. AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SELL OF APPARATUS OR DEVICES WITHOUT PERMISSION.		DIMENSIONAL TOLERANCES () () () () () () () () () () DECIMALS: <50 ±0.1 <50 ±0.15 <50 ±0.2 <30 ±0.1* ±0.3 >50~100 ±0.15 >50~100 ±0.2 >50~100 ±0.25 >30~60 ±0.3* ±0.2 >100~200 ±0.2 >100~200 ±0.25 >100~200 ±0.3 >60~90 ±0.5* X.XX ±0.1 >200 ±0.25 >200 ±0.25 >200 ±0.3			
DESCRIPTION: CONFIDENTIAL MOTOR_F180_5.5~7.5KW_380V_BRAKE		A3 SIZE  THIRD ANGLE PROJ. JCTN		PART NO.: _____	
USED ON		UNIT	mm	SCALE	SHEET 1 OF 1
					00