



Figure similar

Article No. : 6SL3220-3YE20-0UF0

Client order no. :
 Order no. :
 Offer no. :
 Remarks :

Item no. :

Consignment no. :
 Project :

Rated data

Input

| | | |
|----------------------|---------------------------|-----------------|
| Number of phases | 3 AC | |
| Line voltage | 380 ... 480 V +10 % -20 % | |
| Line frequency | 47 ... 63 Hz | |
| Rated voltage | 400V IEC | 480V NEC |
| Rated current (LO) | 9.75 A | 8.00 A |
| Rated current (HO) | 7.75 A | 6.50 A |

Output

| | | |
|----------------------|-----------------|-----------------------------|
| Number of phases | 3 AC | |
| Rated voltage | 400V IEC | 480V NEC₁ |
| Rated power (LO) | 4.00 kW | 5.00 hp |
| Rated power (HO) | 3.00 kW | 4.00 hp |
| Rated current (LO) | 10.20 A | 7.60 A |
| Rated current (HO) | 7.70 A | 6.20 A |
| Rated current (IN) | 10.50 A | |
| Max. output current | 14.00 A | |

| | | |
|-------------------------------------|--------------|--|
| Pulse frequency | 4 kHz | |
| Output frequency for vector control | 0 ... 200 Hz | |
| Output frequency for V/f control | 0 ... 550 Hz | |

Overload capability

| | |
|--------------------|--|
| Low Overload (LO) | 110% base load current IL for 60 s in a 300 s cycle time |
| High Overload (HO) | 150% x base load current IH for 60 s within a 600 s cycle time |

General tech. specifications

| | |
|---------------------------------|---------------|
| Power factor λ | 0.70 ... 0.85 |
| Offset factor $\cos \phi$ | 0.96 |
| Efficiency η | 0.97 |
| Sound pressure level (1m) | 63 dB |
| Power loss ₃ | 0.142 kW |
| Filter class (integrated) | Unfiltered |
| EMC category (with accessories) | without |

Ambient conditions

| | |
|-----------------------------|--|
| Standard board coating type | Class 3C2, according to IEC 60721-3-3:2002 |
|-----------------------------|--|

| | |
|-------------------------|--|
| Cooling | Air cooling using an integrated fan |
| Cooling air requirement | 0.005 m ³ /s (0.177 ft ³ /s) |
| Installation altitude | 1,000 m (3,280.84 ft) |

Ambient temperature

| | |
|-----------|--------------------------------|
| Operation | -20 ... 45 °C (-4 ... 113 °F) |
| Transport | -40 ... 70 °C (-40 ... 158 °F) |
| Storage | -25 ... 55 °C (-13 ... 131 °F) |

Relative humidity

| | |
|----------------|--|
| Max. operation | 95 % At 40 °C (104 °F), condensation and icing not permissible |
|----------------|--|

Mechanical data

| | |
|----------------------|---------------------|
| Degree of protection | IP20 / UL open type |
| Size | FSB |
| Net weight | 5.83 kg (12.85 lb) |

Dimensions

| | |
|--------|-------------------|
| Width | 100 mm (3.94 in) |
| Height | 275 mm (10.83 in) |
| Depth | 218 mm (8.58 in) |

Article No. : **6SL3220-3YE20-0UF0**

Inputs / outputs

Standard digital inputs

| | |
|------------------------|-------|
| Number | 6 |
| Switching level: 0 → 1 | 11 V |
| Switching level: 1 → 0 | 5 V |
| Max. inrush current | 15 mA |

Fail-safe digital inputs

| | |
|--------|---|
| Number | 1 |
|--------|---|

Digital outputs

| | |
|--|----------------|
| Number as relay changeover contact 2Output (resistive load) | DC 30 V, 5.0 A |
|--|----------------|

| | |
|----------------------|---|
| Number as transistor | 0 |
|----------------------|---|

Analog / digital inputs

| | |
|------------|------------------------|
| Number | 2 (Differential input) |
| Resolution | 10 bit |

Switching threshold as digital input

| | |
|-------|-------|
| 0 → 1 | 4 V |
| 1 → 0 | 1.6 V |

Analog outputs

| | |
|--------|-------------------------|
| Number | 1 (Non-isolated output) |
|--------|-------------------------|

PTC/ KTY interface

| | |
|--|--|
| 1 motor temperature sensor input, sensors that can be connected: PTC, KTY and Thermo-Click, accuracy ±5 °C | |
|--|--|

Closed-loop control techniques

| | |
|---|-----|
| V/f linear / square-law / parameterizable | Yes |
| V/f with flux current control (FCC) | Yes |
| V/f ECO linear / square-law | Yes |
| Sensorless vector control | Yes |
| Vector control, with sensor | No |
| Encoderless torque control | Yes |
| Torque control, with encoder | No |

Communication

| | |
|---------------|-----------------------|
| Communication | PROFINET, EtherNet/IP |
|---------------|-----------------------|

Connections

Signal cable

| | |
|-------------------------|--|
| Conductor cross-section | 0.15 ... 1.50 mm ² (AWG 24 ... AWG 16) |
|-------------------------|--|

Line side

| | |
|-------------------------|--|
| Version | screw-type terminal |
| Conductor cross-section | 1.50 ... 6.00 mm ² (AWG 16 ... AWG 10) |

Motor end

| | |
|-------------------------|--|
| Version | Screw-type terminals |
| Conductor cross-section | 1.50 ... 6.00 mm ² (AWG 16 ... AWG 10) |

DC link (for braking resistor)

| | |
|---------------|--------------------------|
| PE connection | On housing with M4 screw |
|---------------|--------------------------|


Max. motor cable length

| | |
|------------|-------------------|
| Shielded | 150 m (492.13 ft) |
| Unshielded | 300 m (984.25 ft) |

Converter losses to IEC61800-9-2*

| | |
|------------------|-----|
| Efficiency class | IE2 |
|------------------|-----|

| | |
|--|--------|
| Comparison with the reference converter (90% / 100%) | 33.0 % |
|--|--------|

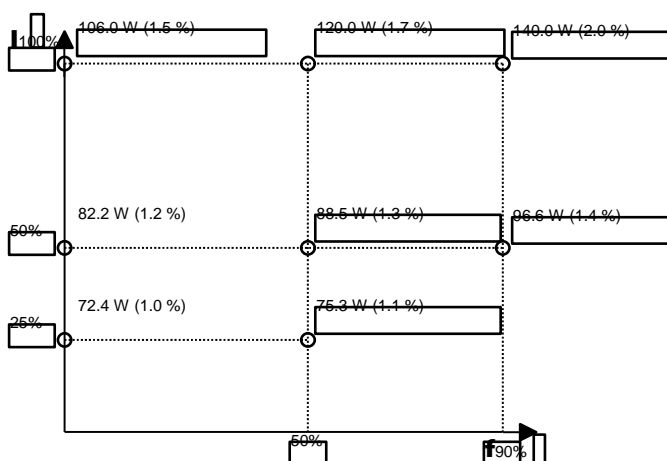

The percentage values show the losses in relation to the rated apparent power of the converter.

The diagram shows the losses for the points (as per standard IEC61800-9-2) of the relative torque generating current (I) over the relative motor stator frequency(f). The values are valid for the basic version of the converter without options/components.

*converted values

Standards

| | |
|---------------------------|--|
| Compliance with standards | UL, cUL, CE, C-Tick (RCM), EAC, KCC, SEMI F47, REACH |
|---------------------------|--|

| | |
|------------|---|
| CE marking | EMC Directive 2004/108/EC, Low-Voltage Directive 2006/95/EC |
|------------|---|

¹⁾ The output current and HP ratings are valid for the voltage range 440V-480V

²⁾ Typical value. More information can be found in the element group "Converter losses to IEC 61800-9-2" in this datasheet.

Article No. : 6SL3220-3YE20-0UF0

Operator panel: Intelligent Operator Panel (IOP-2)

Screen

| | |
|-------------------|-----------------|
| Display design | LCD color |
| Screen resolution | 320 x 240 Pixel |

Mechanical data

| | |
|----------------------|--------------------|
| Degree of protection | IP55 / UL type 12 |
| Net weight | 0.134 kg (0.30 lb) |

Dimensions

| | |
|--------|---------------------|
| Width | 70.00 mm (2.76 in) |
| Height | 106.85 mm (4.21 in) |
| Depth | 19.65 mm (0.77 in) |

Ambient conditions

Ambient temperature

| | |
|-----------|--|
| Operation | 0 ... 50 °C (32 ... 122 °F) 55 °C only with door mounting kit |
| Storage | -40 ... 70 °C (-40 ... 158 °F) |
| Transport | -40 ... 70 °C (-40 ... 158 °F) |

Relative humidity at 25°C during

| | |
|----------------|------|
| Max. operation | 95 % |
|----------------|------|

Approvals

| | |
|----------------------------|--------------------------|
| Certificate of suitability | CE, cULus, EAC, KCC, RCM |
|----------------------------|--------------------------|